

K. VALDEMĀRA IELA 2A, RĪGA, LV-1050, LATVIJA. TĀLRUNIS +371 67022300, E-PASTS INFO@BANK.LV, WWW.BANK.LV

# Functional Specification of the Instant Payment Service of the Electronic Clearing System of Latvijas Banka (EKS)

Published on: 28 November 2023

Changes implemented on: 17 March 2024

1.		sage exchange in the instant payment service	
2.		sent by the instant payment service	
3.		etable of the instant payment service	
4.		format to be used for generating messages	
5.	Man	agement of instant payment liquidity position	
	5.1.	Current IP liquidity position request message	
		Liquidity transfer order to increase current IP liquidity position	
	5.3.	Liquidity transfer order to decrease current IP liquidity position	
	5.4.	Notification of rejection of liquidity transfer order to increase/decrease cu	
	IP liqui	dity position	
	5.5.	Current IP liquidity position message (camt.052)	11
	5.6.	IP liquidity position credit/debit notification (camt.054)	12
	5.7.	Statement of IP cover account (camt.053)	14
6.	Proc	ess flow of instant payment order processing	21
7.	Proc	ess flow of instant payment cancellation request, instant payment return or	der
an	d instar	nt payment resolution of investigation processing	27
8.	Gene	erating messages	30
	8.1.	Instant payment message (pacs.008.001.08)	30
	8.2.	Instant payment return message (pacs.004.001.09)	39
	8.3.	Instant payment status message (pacs.002.001.10)	
	8.4.	Instant payment cancellation request message (camt.056.001.08)	51
	8.5.	Instant payment resolution of investigation message (camt.029.001.09)	57
	8.6.	Instant payment status request message (pacs.028.001.03)	
	8.7.	Reply message to an incoming message not compliant with the scheme	68
	8.8.	Sets of codes allowed to be used	
	8.8.1	. Clearing System codes	69
	8.8.2	2. Payment purpose category ISO codes	69
	8.8.3		
	8.8.5		
	8.8.6	5. Account identification codes	69
	8.8.7	Proxy account type codes	69
	8.9.	Codes used in instant payment service messages	
	8.9.1	1.	
	8.9.2	Cancellation reason ISO codes	70
	8.9.3	S. ISO codes for resolution of investigation reason	70
	8.9.4	<u> </u>	
	8.9.5	•	
9.	Doul	ble-entry check	
10		echnical maintenance message	
11		ectronically signed messages	

The "Functional Specification of the instant payment service of the Electronic Clearing System of Latvijas Banka (EKS)" (hereinafter, the Specification) establishes the indications for generating the messages to be processed by the instant payment service of the electronic clearing system of Latvijas Banka (hereinafter, the EKS) and the structure of the messages associated with their processing as well as instructions for exchanging messages in relation to participant's TIPS DCA.

The terms used in the Specification are consistent with the terms used in Appendix 1 "System Rules for Participation in the EKS" to Latvijas Banka's Council Procedure No. 183/3 "Participation Procedure in Latvijas Banka's Electronic Clearing System" of 9 September 2010 and their explanations.

The process flows and their descriptions have been included in the present Specification for reference only.

The indicators used in message and file descriptions are as follows:

- a) field status indicators:
- M-mandatory,
- O optional;
- C conditional;
  - b) field format indicators:
- n numbers (from 0 to 9),
- a capital letters of the Latin alphabet (from A to Z),
- c capital letters of the Latin alphabet and numbers,
- x any character compliant with the requirements of Paragraph 4 herein;
  - c) field length indicators:
- nn maximum field length (minimum is 1),
- nn! fixed field length, e.g. 3!;
  - d) date and time indicators:

ISODate - YYYY-MM-DD,

ISODateTime – see EKS schema files for details.

#### 1. Message exchange in the instant payment service

The instant payment service processes messages generated in accordance with the SEPA Instant Credit Transfer Scheme Rulebook approved by the European Payments Council, the SEPA Credit Transfer Scheme Inter-PSP Implementation Guidelines (hereinafter, SCT Inst Inter-PSP IG) approved by the European Payments Council and ISO 20022 XML messaging standards (hereinafter, ISO 20022). The instant payment service validates messages against message schema for EKS Instant Payment Service published at Latvijas Banka's website.

The instant payment service receives and processes the following individual messages.

Message name	Message type	Sending institution	Message queue
Payment messages			
Instant payment message	pacs.008.001.08	EKS or participant	PAYMENT
Instant payment return message	pacs.004.001.09	EKS or participant	PAYMENT
Information messages			
Instant payment cancellation request message	camt.056.001.08	EKS or participant	PAYMENT
Instant payment resolution of investigation message	camt.029.001.09	EKS or participant	PAYMENT

Instant payment status	pacs.028.001.03	EKS or participant	RESPONSE
investigation request message			
Instant payment status message	pacs.002.001.10	EKS or participant	RESPONSE
Reply message to an incoming	LB.FastEKS.CrptMsg	EKS	RESPONSE
erroneous message			
Current IP liquidity position	camt.060.001.05	Participant	INFO
request message			
Current IP liquidity position	camt.052.001.08	EKS	INFO
message			
Technical maintenance message	admi.004.001.02	EKS	INFO
IP liquidity position credit/debit	camt.054.001.08	EKS	INFO
notification			

The instant payments service in the role of instructing party, within the meaning of Latvijas Banka's rules for participation in TARGET-Latvija, ensures transmission of the following messages related to the participant's TIPS DCA:

Message name	Message type	Sending institution	Message queue
Payment messages			
Instant payment message	pacs.008.001.08	TIPS or participant	PAYMENT
Instant payment return message	pacs.004.001.09	TIPS or participant	PAYMENT
Information messages			
Instant payment cancellation	camt.056.001.08	TIPS or participant	PAYMENT
request message			
Instant payment resolution of	camt.029.001.09	TIPS or participant	PAYMENT
investigation message			
Instant payment status	pacs.028.001.03	TIPS or participant	RESPONSE
investigation request message			
Instant payment status message	pacs.002.001.10	TIPS or participant	RESPONSE
TIPS DCA credit/debit	camt.054.001.06	TIPS or participant	INFO
notification			

Upon receiving the incoming instant payment message pacs.008.001.08 which is addressed to the participant and in which the BIC reachable on the participant's TIPS DCA is specified in the <CdtrAgt> field, the instant payment service forwards the received message to the participant without making changes to the participant's IP cover account.

When refunding instant payment that was addressed to the BIC reachable on the participant's TIPS DCA, the participant ensures that the BIC code indicated in the pacs.004.001.09 <CdtrAgt> field of the instant payment return message corresponds to the BIC reachable on the participant's TIPS DCA. Upon receipt of such pacs.004.001.09, the instant payment service forwards the instant payment return message without making changes to the participant's IP cover account.

When configuring the TIPS DCA in accordance with the Reference and Static Data Registration User Guide and the TIPS technical/functional documentation published on the ECB website, the participant specifies o=lacblv2x,o=swift as instructing party DN.

Messages between the participants and the instant payment service are exchanged using the Advanced Message Queuing Protocol (AMQP). AMQP is a message exchange protocol ensuring high-performance, safe and guaranteed delivery of messages to recipients. AMPQ is an open standard protocol with publicly available specification; therefore, it is a platform-independent solution enabling messaging between client

applications based on various operating systems and written in various programming languages.

The messages to be submitted by participants to the instant payment service may be addressed to those EKS participants using the instant payment service and addressable BIC holders as well as the entities reachable via the TIPS platform (see Charts 1 and 2).

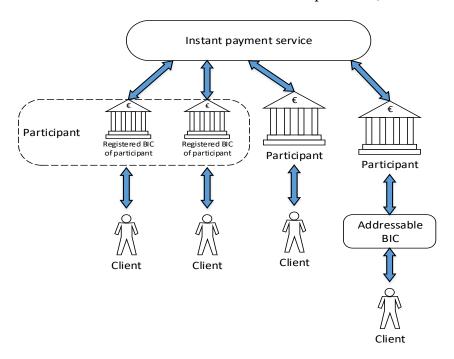


Chart 1. The operational process flow of the instant payment service for exchanging messages between the participants

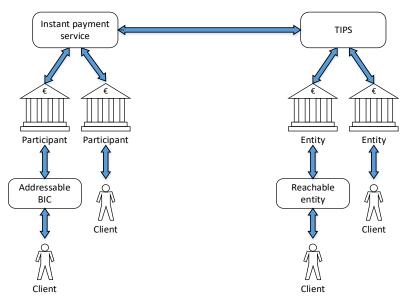


Chart 2. Operational process flow of the instant payment service for exchanging messages with entities reachable via the TIPS platform

Latvijas Banka shall establish and maintain a list containing information on entities reachable via the instant payment service (a routing table). Any changes to the routing table shall take effect at 19.00 on the date when a list is received.

The routing table is a text file with the following structure:

No.	Element	Format	Description	
1.	Name	105a	Name.	
2.	BIC	11a	11-digit BIC or	
			8-digit BIC with the extension "XXX".	
3.	Valid from	8n	Date when the data become valid (YYYYMMDD).	
4.	Valid until	8n	Date up to which the data are valid (YYYYMMDD).	
5.	Type of	2n	Refers to the participant's reachability:	
	participation		"05" – participant of the instant payment service;	
			"06" –addressable BIC holder of the instant payment service;	
			"20" – participant of another payment system.	

The participants can receive information on entities reachable in TIPS platform by subscribing to "TIPS Directory" report in TIPS CRDM. The relevant file shall be formatted and sent to the participants in accordance with TIPS technical/functional documentation.

# 2. Files sent by the instant payment service

The instant payment service generates the following files and make them available to participants for downloading at the file exchange service folder FEKS\IN.

Name	Message type	File name and file naming principles	Preparing the file for sending	File sending frequency
IP liquidity position report	camt.052	"RPGGGGMMDDHHnn n.xml", where a variable part "GGGGMMDDHH" represents the date and time when the file is created, a variable part "nnn" represents the report page sequence number.	Each file contains one message/report page. Each report page contains max 100,000 entries. Where a report has more than 100,000 entries, it shall be divided in several messages/report pages. Each file shall be zipped (with the file extension ".zip") and then encrypted and signed (the extension of an encrypted file is ".p7m").	Every day.
Statement of IP cover account	camt.053	"AMPGGGGMMDDnnn. xml", where a variable part "GGGGMMDD" represents the date when the file is created, a variable part "nnn" represents the report page sequence number.	Each file contains one message/statement page. Each statement page contains max 100,000 entries. Where a statement has more than 100,000 entries, it shall be divided in several messages/statement pages. Each file shall be zipped (with the file extension ".zip") and then encrypted and signed (the extension of an encrypted file is ".p7m").	On TARGET business days.
Routing table	Text file.	"AMSGGGGMMDD.txt" , where a variable part "GGGGMMDD" is the date when the updated table teakes effect.	The file shall be zipped (with the file extension ".zip").	Every day.

# 3. Timetable of the instant payment service

Instant payment service business	24/7/365
hours	
Generating and transmission of the	Every day
IP liquidity position report of the	at 12.05 a.m. to 12.35 a.m.
previous calendar date	
Balancing of the initial IP liquidity	On TARGET business days
position	at 8.30 a.m. to 9.00 a.m.
Processing of requests on changes in	24/7/365
the instant payment liquidity	
positions of the participants	
End-of-day processing	On TARGET business days
	at 7.05–07.10 p.m.
Generating and transmission of the	On TARGET business days
statement of IP cover account of the	at 7.05–07.10 p.m.
settlement day	

Latvijas Banka may change the timetable of the instant payment service in contingency situations.

#### 4. The format to be used for generating messages

#### 4.1. The format to be used for generating messages

Participants shall maintain the following set of UTF-8 characters:

- capital letters of the Latin alphabet (from A to Z);
- small letters of the Latin alphabet (from a to z);
- digits;
- characters '/', '-', '?', ':', '(', ')', '.', ',', "", '+';
- space.

UTF-8 encoding is used for character encoding with a respective indication in the XML file header.

#### Example

```
<?xml version="1.0" encoding="UTF-8">
```

Following the SCT Inst Inter-PSP IG, the character set for references and identifiers is restricted to Latin characters. In respect to other fields the instant payment service transmits all UTF-8 characters without verifying which sets of characters are supported by each participant. A participant is entitled to reject a payment message where the characters not listed in this Paragraph have been used, if the participant has not agreed to their processing.

#### 4.2. The format to be used for message identifiers

Message identifiers shall meet following condition:

- maximum length is 35 characters;
- only characters 0-9 a-z A- $\mathbb{Z}/-?:()$ ., '+ and space can be used;
- leading or trailing spaces are not allowed;
- may not contain double slash "//";
- may not start or end with slash "/".

#### 5. Management of instant payment liquidity position

#### 5.1. Current IP liquidity position request message

A participant can monitor the current IP liquidity position for each of its registered BIC by using the instant payment service workstation or by sending a current IP liquidity position request message. Latvijas Banka shall provide a participant's candidate the instant payment service workstation user guide when it prepares to connect to Latvijas Banka's Information System for Monitoring Customer Accounts, while for participants the current version of the user guide is available in the workstation.

The participant shall generate the current IP liquidity position request message in accordance with ISO 20022 camt.060 XML message and send it to the instant payment service.

Element	Format or data	Sta-	Description
	type	tus	
┬ <grphdr></grphdr>	Set of elements	M	
— <msgid></msgid>	35x	M	Message identifier. Space is not allowed.
☐ <credttm></credttm>	ISODateTime	M	Date and time of message creation.
<pre> <rptgreq></rptgreq></pre>	Set of elements	M	
- <reqdmsgnmid></reqdmsgnmid>	35x	M	Requested message type; only code "camt.052" is allowed.
└┬ <acctownr></acctownr>	Set of elements	M	IP cover account owner.
└┬ <agt></agt>	Set of elements	M	
T <fininstnid></fininstnid>	Set of elements	M	
└ <bicfi></bicfi>	4!c2!a2!c	M	Registered BIC.

#### 5.2. Liquidity transfer order to increase current IP liquidity position

Liquidity transfer order to increase the current IP liquidity position is sent with the purpose of increasing the current IP liquidity position for the registered BIC of the participant. A participant may input an instruction in instant payment service workstation or prepare it as a SWIFT MT298 format message and send it to Latvijas Banka via SWIFT FIN communication channels. In the SWIFT MT298 format message in the field :12: subtype "702" shall be indicated and in Field :77E: message "/FASTEKS/INCCOV/" shall be indicated, followed by the amount (in format 15d) for which the current IP liquidity position should be increased.

#### Example:

:12:702

:77E:/FASTEKS/INCCOV/50000

#### 5.3. Liquidity transfer order to decrease current IP liquidity position

Liquidity transfer order to decrease the current IP liquidity position is sent with the purpose of decreasing the current IP liquidity position for the registered BIC of the participant. A participant may input an instruction in instant payment service workstation or prepare it as a SWIFT MT298 format message and send it to Latvijas Banka via SWIFT FIN communication channels. In the SWIFT MT298 format message in the field :12: message subtype "703" shall be indicated and in Field :77E: code "/FASTEKS/DECCOV/" shall be indicated, followed by the amount (in format 15d) for which the current IP liquidity position should be decreased.

#### Example:

:12:703

:77E:/FASTEKS/DECCOV/50000

# 5.4. Notification of rejection of liquidity transfer order to increase/decrease current IP liquidity position

If the liquidity transfer order to increase/decrease current IP liquidity position cannot be processed, Latvijas Banka shall reject it and inform the participant about the rejection in instant payment service workstation. If the liquidity transfer order has been sent as a SWIFT MT298 format message, Latvijas Banka shall inform the participant about the rejection also by sending a SWIFT MT298 format message. In the SWIFT MT298 format message in the field :77E: code "/FASTEKS/" shall be indicated, followed by the reference of the request and in the field :12: the subtype of the message shall be indicated:

"712" - if the balance of the relevant account is not sufficient to execute the request or "711" - if the request has been incorrectly generated.

#### Example:

:12:712

:77E:/FASTEKS/REFERENCE123

#### 5.5. Current IP liquidity position message (camt.052)

The instant payment service shall generate a current IP liquidity position message in accordance with ISO 20022 camt.052.001.08 XML message and send it to the participant, using its registered BIC code:

- a) as a reply to the received current IP liquidity position request message;
- b) if the current IP liquidity position for the registered BIC of the participant falls below the limit pre-set by the participant and the participant, using the instant payment service's workstation, has chosen to receive a message to that effect. Such a message is sent at the moment when the current IP liquidity position for the registered BIC of the participant falls below the limit pre-set by the participant as well as every 30 minutes after that as long as the current IP liquidity position still remains below that limit.

F1	E 1 :	G4 -	Describetor
Element	Format or data	Sta-	Description
	type	tus	
- <bktocstmr< td=""><td>Set of elements</td><td>M</td><td></td></bktocstmr<>	Set of elements	M	
AccRpt>			
┬ <grphdr></grphdr>	Set of elements	M	
— <msgid></msgid>	35x	M	Message identifier. Space is not allowed.
- <credttm></credttm>	ISODateTime	M	Date and time of message creation.
T <orgnlbizqry></orgnlbizqry>	Set of elements	M	
☐ <msgid></msgid>	35x	M	Identifier of the message which the current
			message replies to. Shall contain the value
			"BELOWLIMIT" if the instant payment service
			has generated a message to inform that the
			current IP liquidity position has fallen below the
			limit.
<rpt></rpt>	Set of elements	M	
- <id></id>	35x	M	Report identifier.
CreDtTm>	ISODateTime	M	Date and time of report creation.
T <acct></acct>	Set of elements	M	Account information.
< Id>	Set of elements	M	Account identifier.
	Set of elements	M	
	35x	M	IP cover account number.
└── <ownr></ownr>	Set of elements	M	Account owner.
	Set of elements	M	Identification of the account owner.
T <orgid></orgid>	Set of elements	M	
└ <anybic></anybic>	4!c2!a2!c[3!c]	M	Registered BIC of the participant.
└┬ <bal></bal>	Set of elements	M	Account balance information.
T <tp></tp>	Set of elements	M	Account balance type.
CdOrPrtry>	Set of elements	M	
└ <cd></cd>	4!a	M	Account balance type code. Code "ITAV" is
			used – current IP liquidity position that may
			change during the day.
— <amt></amt>	18d	M	Current IP liquidity position.
	EUR		
— <cdtdbtind></cdtdbtind>	4!a	M	Code "CRDT" is used.
<b>└</b> <dt></dt>	Set of elements	M	
└ <dttm></dttm>	ISODateTime	M	Date and time when current IP liquidity position
			was recorded.

#### 5.6. IP liquidity position credit/debit notification (camt.054)

The instant payment service shall generate an IP liquidity position credit/debit notification message in accordance with ISO 20022 camt.054.001.08 XML message and send it to the participant, using its registered BIC code, to notify the participant on the changes in its IP liquidity position that took place as a result of:

- a) execution of participant's liquidity transfer order to decrease or increase its current IP liquidity position;
- b) balancing of the initial IP liquidity position.

Element	Format or data	Sta	Description
	type	-tus	
<pre></pre>	Set of elements	M	
T <grphdr></grphdr>	Set of elements	M	
☐ <msgid></msgid>	35x	M	Message identifier. Space is not allowed.
L <credttm></credttm>	ISODateTime	M	Date and time of message creation.
<ntfctn></ntfctn>	Set of elements	M	Notification information.
	35x	M	Notification identifier.
- <credttm></credttm>	ISODateTime	M	Date and time of notification creation.
T <acct></acct>	Set of elements	M	Account information.
└┬ <id></id>	Set of elements	M	Account identifier.
└ <0thr>	Set of elements	M	
└ <id></id>	34x	M	IP cover account number.
<ntry></ntry>	Set of elements	M	Set of elements used to specify an entry in the notification.
- <ntryref></ntryref>	35x	M	Entry reference.
— <amt></amt>	18d EUR	M	Amount.
— <cdtdbtind></cdtdbtind>	4!a	M	Indicates whether the entry is a credit or a debit entry. Code "CRDT" is used to indicate a credit entry, code "DBIT" is used to indicate a debit entry.
T <sts></sts>	Set of elements	M	Entry status.
└ <cd></cd>	4!a	M	Entry status code. Code "BOOK" is used.
T <bookgdt></bookgdt>	Set of elements	M	
- <dttm></dttm>	ISODateTime	M	Date and time when an entry is posted to an account.
<bktxcd></bktxcd>	Set of elements	M	Set of elements used to identify the type of underlying transaction resulting in an entry.
- <domn></domn>	Set of elements	M	
- <cd></cd>	4!a	M	Only ISO 20022 codes are allowed (Table 1).
- <fmly></fmly>	Set of elements	M	
	4!a	M	Only ISO 20022 codes are allowed (Table 2).
<pre>SubFmlyCd&gt;</pre>	4!a	M	Only ISO 20022 codes are allowed (Table 3).
<pre>NtryDtls&gt;</pre>	Set of elements	M	Set of elements used to provide details on the entry.

└┬ <txdtls></txdtls>	Set of elements	M	
├ <rltdpties></rltdpties>	Set of elements	M	Related parties.
T <dbtr></dbtr>	Set of elements	M	Debtor.
└┰ <pty></pty>	Set of elements	M	
└┬ <id></id>	Set of elements	M	
└── <orgid></orgid>	Set of elements	M	
└ <anybic></anybic>	4!c2!a2!c[3!c]	M	BIC of the debtor.
T <dbtracct></dbtracct>	Set of elements	M	Debtor account.
└┰ <id></id>	Set of elements	M	
-	Set of elements	M	
└ <id></id>	34x	M	Account number.
T <cdtr></cdtr>	Set of elements	M	Creditor.
└┰ <pty></pty>	Set of elements	M	
└┬ <id></id>	Set of elements	M	
└┬ <orgid></orgid>	Set of elements	M	
└ <anybic></anybic>	4!c2!a2!c[3!c]	M	BIC of the creditor.
- CdtrAcct>	Set of elements	M	Creditor account.
└┬ <id></id>	Set of elements	M	
一 <0thr>	Set of elements	M	
└ <id></id>	34x	M	Account number.

# 5.7. Statement of IP cover account (camt.053)

The statement of IP cover account shall be generated every TARGET business day in accordance with ISO 20022 camt.053.001.08 message.

Element	Format or data type	Sta- tus	Description
└ <bktocstmrstmt></bktocstmrstmt>	Set of elements	M	
- CGrpHdr>	Set of elements	ļ	
- (MsgId>		M	Manager identifier Constant allowed
T (MSg1d)	35x	M	Message identifier. Space is not allowed.
<credttm></credttm>	ISODateTime	M	Date and time of message creation.
<pre>MsgPgntn&gt;</pre>	Set of elements	M	Set of elements used to provide details on the page number of the message.
<pgnb></pgnb>	5x	M	Page number.
└ <lastpgind></lastpgind>	4!a	M	Indicates whether the current page of the statement is the last page. Code "true" is used to indicate the last page, otherwise code "false" is used.
	Set of elements	M	Set of elements used to provide details on the statement.
<id></id>	35x	M	Statement identifier.
- <credttm></credttm>	ISODateTime	M	Date and time of statement creation.
<pre><frtodt></frtodt></pre>	Set of elements	M	Range of time between a start of a period and an end of a period for which the account statement is issued.
<pre><frdttm></frdttm></pre>	ISODateTime	M	Date and time when statement period starts.
└ <todttm></todttm>	ISODateTime	M	Date and time when statement period ends.
- <acct></acct>	Set of elements	M	Account information.
- <id></id>	Set of elements	M	Account identifier.
- <othr></othr>	Set of elements	M	
- <id></id>	34x	M	IP cover account number.
	Set of elements	M	Account owner information.
T <id></id>	Set of elements	M	Account owner identifier.
- <orgid></orgid>	Set of elements	M	
<pre><anybic></anybic></pre>	4!c2!a2!c[3!c]	M	Registered BIC of the participant.
- <bal></bal>	Set of elements	M	Set of elements used to define the balance. Two sequences are used – to indicate the balance at the start of the reporting period and at the end of the reporting period.
	Set of elements	M	Specifies the nature of a balance.

SubTp>   Set of elements   S
"CLBD" is used to indicate the closing balance.    Set of elements   C   Balance subtype is used for paginated messages.   Code "INTM" is used along with code "OPBD" or "CLBD" in the field "TPS" (CdOrPTTTY) (CdO, and indicates the intermediate characteristic of the respective balance.
balance.
Set of elements   C   Balance subtype is used for paginated   messages.
Messages   Code "INTM" is used along with code "OPBD" or "CLBD" in the field   CTp>/CCdOrPrtry>/CCd>, and indicates the intermediate characteristic of the respective balance.   Messages   Messages
Messages   Code "INTM" is used along with code "OPBD" or "CLBD" in the field   CTp>/CCdOrPrtry>/CCd>, and indicates the intermediate characteristic of the respective balance.   Messages   Messages
Messages   Code "INTM" is used along with code "OPBD" or "CLBD" in the field   CTp>/CCdOrPrtry>/CCd>, and indicates the intermediate characteristic of the respective balance.   Messages   Messages
Alta   M   Code "INTM" is used along with code "OPBD" or "CLBD" in the field
"OPBD" or "CLBD" in the field <tp> <tp> <tp> <tp></tp></tp></tp></tp>
Camt>   18d
indicates the intermediate characteristic of the respective balance.    Amt   EUR
the respective balance.    Camt   I8d EUR
CodtDbtInd>   18d   EUR   M   Code "CRDT" is used to indicate a credit position.
Codt   CRDT" is used to indicate a credit position.
Codt   CRDT" is used to indicate a credit position.
Codt   CRDT" is used to indicate a credit position.   Code "CRDT" is used to indicate a credit position.
Code "CRDT" is used to indicate a credit position.
Date when the balance was recorded.   Date when the balance was recorded.
Set of elements   M   Date when the balance was recorded.
Set of elements   Set of elements   M   Summary on entries included in the statement.
Set of elements   M   Summary on entries included in the statement.
Set of elements   Set of elements   M   Specifies the total number and sum of entries per bank transaction code.
Set of elements   Set of elements   M   Specifies the total number and sum of entries per bank transaction code.
Set of elements   M   Specifies the total number and sum of entries per bank transaction code.
BkTxCd>  entries per bank transaction code.    CodtNtries   Set of elements   M   Information on credit entries. Is indicated for the following transaction types (code in the field <domn>/<cd></cd></domn>
CdtNtries   Set of elements   M   Information on credit entries. Is indicated for the following transaction types (code in the field <domn>/<cd></cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field <pmly>/<cd>/ code in the field <pmly>/</pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field <pmly>/<cd>/ code in the field <pmly>/</pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></pmly></cd></domn>
the field <domm>/<cd>/ code in the field <fmly>/<cd>/ code in the field <fmly>/<cd>/ code in the field <fmly>/<cd>/ code in the field <subfmlycd>):  1) PMNT/RRCT/ESCT;  2) PMNT/RRCT/RRTN;  3) CAMT/ACCB/TOPG.  M Number of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.  Sum&gt;  18d EUR  M Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum of credit entries   If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Information on debit entries   Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn></subfmlycd></cd></fmly></cd></fmly></cd></fmly></cd></domm>
<pre></pre>
<pre></pre>
1) PMNT/RRCT/ESCT; 2) PMNT/RRCT/RRTN; 3) CAMT/ACCB/TOPG.    Sum>   18d   EUR   M   Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Set of elements   M   Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd></cd></domn>
2) PMNT/RRCT/RRTN; 3) CAMT/ACCB/TOPG.  M Number of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.  Sum>  Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.  Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.  Set of elements  M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd> // code in the field</cd></domn>
3) CAMT/ACCB/TOPG.    Sum   Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum   Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum   Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Set of elements   M   Information on debit entries. Is indicated for the following transaction types (code in the field < Domn>/ <cd></cd>
Number of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum
been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    ObtNtries
been no transactions of the respective type on the reporting date, zero "0" is indicated.    Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    ObtNtries
on the reporting date, zero "0" is indicated.    Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    ObtNtries
Sum   Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.    Set of elements   M   Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd></cd></domn>
EUR transactions of the respective type on the reporting date, zero "0" is indicated.  Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
EUR transactions of the respective type on the reporting date, zero "0" is indicated.  Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
EUR transactions of the respective type on the reporting date, zero "0" is indicated.  Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
EUR transactions of the respective type on the reporting date, zero "0" is indicated.  Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
reporting date, zero "0" is indicated.  TobtNtries> Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
Set of elements M Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
for the following transaction types (code in the field <domn>/<cd>/ code in the field</cd></domn>
the field <domn>/<cd>/ code in the field</cd></domn>
/
<fmly>/<cd>/ code in the field</cd></fmly>
<subfmlycd>):</subfmlycd>
1) PMNT/IRCT/ESCT;
2) PMNT/IRCT/RRTN; 2) CAMT/ACCR/SWED
3) CAMT/ACCB/SWEP.
M Number of debit entries. If there have been
no transactions of the respective type on
the reporting date, zero "0" is indicated.
18d Sum of debit chures. If there have been no
EUR transactions of the respective type on the
reporting date, zero "0" is indicated.

	Set of elements	M	Set of elements used to fully identify the
			type of underlying transaction resulting in
	G . C 1		an entry.
- Col	Set of elements	M	0.1.100.20022 1 11 1/5.11
	4!a	M	Only ISO 20022 codes are allowed (Table
	G	3.5	1).
- <fmly></fmly>	Set of elements	M	
	4!a	M	Only ISO 20022 codes are allowed (Table
	4.	3.6	2).
└ <subfmly< td=""><td>4!a</td><td>M</td><td>Only ISO 20022 codes are allowed (Table</td></subfmly<>	4!a	M	Only ISO 20022 codes are allowed (Table
Cd>			3).
	C . 4 . C . 1 4 .	-	C. t. C. I
T <ntry></ntry>	Set of elements	С	Set of elements used to specify an entry in
(N+ mr.Dof)	25	3.4	the statement.
- <ntryref></ntryref>	35x	M	Entry reference.
— <amt></amt>	18d	M	Amount.
- <cdtdbtind></cdtdbtind>	EUR	3.4	To Produce 1 of the decrease for a second to the
- <catbbtina></catbbtina>	4!a	M	Indicates whether the entry is a credit or a
			debit entry. Code "CRDT" is used to indicate a credit entry, code "DBIT" is used
- Sts>	Set of elements	M	to indicate a debit entry. Entry status.
- <cd></cd>	4!a	M	Entry status code. Code "BOOK" is used.
_ \	4!a	IVI	Entry status code. Code BOOK is used.
- T <bookgdt></bookgdt>	Set of elements	M	
- CDOORGEC	ISODateTime	M	Data and time when an entry is nested to
	150Date Fille	IVI	Date and time when an entry is posted to an account.
			an account.
- <bktxcd></bktxcd>	Set of elements	M	Set of elements used to identify the type of
I (Bringa)	Set of elements	171	underlying transaction resulting in an
			entry.
			ondy.
- <domn></domn>	Set of elements	M	
<cd></cd>	4!a	M	Only ISO 20022 codes are allowed (Table
			1).
- <fmly></fmly>	Set of elements	M	
	4!a	M	Only ISO 20022 codes are allowed (Table
			2).
└ <subfmlycd></subfmlycd>	4!a	M	Only ISO 20022 codes are allowed (Table
]			3).
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Set of elements	M	Set of elements used to provide details on
			the entry.
T <txdtls></txdtls>	Set of elements	M	
→ <rltdagts></rltdagts>	Set of elements	M	
T <dbtragt></dbtragt>	Set of elements	M	Debtor agent.
- <fininstnid></fininstnid>	Set of elements	M	
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC of the debtor agent.
- <cdtragt></cdtragt>	Set of elements	M	Creditor agent.
- <fininstnid></fininstnid>	Set of elements	M	
└── <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC of the creditor agent.
- <rltddts></rltddts>	Set of elements	C	Used, when <domn>/<cd> contains code</cd></domn>
		~	"PMNT".
- <accptnc< td=""><td>ISODateTime</td><td>С</td><td>Used, when <subfmlycd> contains code</subfmlycd></td></accptnc<>	ISODateTime	С	Used, when <subfmlycd> contains code</subfmlycd>
DtTm>	1502410111110		"ESCT".
- <intrbk< td=""><td>ISODate</td><td>С</td><td>Used, when <subfmlycd> contains code</subfmlycd></td></intrbk<>	ISODate	С	Used, when <subfmlycd> contains code</subfmlycd>
SttlmDt>	15012410		"RRTN".
	<u> </u>	ı	

# 5.8. IP liquidity position report (camt.052)

The IP liquidity position report shall be generated every calendar day in accordance with ISO  $20022\ camt.052.001.08\ message.$ 

Eleme	ent	Format or data	Sta-	Description
1 4		type	tuss	
	BkToCstmrAcctRpt>	Set of elements	M	
	<pre><grphdr> Set of elements</grphdr></pre>		M	
	<msgid></msgid>	35x	M	Message identifier. Space is not allowed.
	- <credttm></credttm>	ISODateTime	M	Date and time of message creation.
	T <msgpgntn></msgpgntn>	Set of elements	M	Set of elements used to provide details on the page number of the message.
	<pre>PgNb&gt;</pre>	5x	M	Page number.
	└ <lastpgind></lastpgind>	4!a	M	Indicates whether the current page of the report is the last page. Code "true" is used to indicate the last page, otherwise code "false" is used.
	<rpt></rpt>	Set of elements	M	Set of elements used to provide details on the report.
<del></del>	- <id></id>	35x	M	Report identifier.
-	- <credttm></credttm>	ISODateTime	M	Date and time of report creation.
	<pre><frtodt></frtodt></pre>	Set of elements	M	Range of time between a start of a period and an end of a period for which the report is issued.
	<pre><frdttm></frdttm></pre>	ISODateTime	M	Date and time when report period starts.
	<todttm></todttm>	ISODateTime	M	Date and time when report period ends.
	T <acct></acct>	Set of elements	M	Account information.
	T <id></id>	Set of elements	M	Account identifier.
	一 <othr></othr>	Set of elements	M	
	└ <id></id>	34x	M	IP cover account number.
	Set of elements		M	Account owner information.
	└_ <id></id>	Set of elements	M	Account owner identifier.
	└┬ <orgid></orgid>	Set of elements	M	
	- <anybic></anybic>	4!c2!a2!c[3!c]	M	Registered BIC of the participant.
	Set of elements		M	Set of elements used to define the balance. Two sequences are used – to indicate the balance at the start of the reporting period and at the end of the reporting period.
	<tp></tp>	Set of elements	M	Specifies the nature of a balance.
	⊤ <cdorprtry></cdorprtry>	Set of elements	M	

< Cd>	4!a	M	Balance type code. Code "OPBD" is used to indicate the opening balance, code "CLBD" is used to indicate the closing balance.
<subtp></subtp>	Set of elements	С	Balance subtype is used for paginated messages.
- <cd></cd>	4!a	M	Code "INTM" is used along with code "OPBD" or "CLBD" in the field <tp>/<cdorprtry>/<cd>, and indicates the intermediate characteristic of the respective balance.</cd></cdorprtry></tp>
— <amt></amt>	18d EUR	M	IP cover account balance.
- <cdtdbtind></cdtdbtind>	4!a	M	Code "CRDT" is used to indicate a credit position.
- <dt></dt>	Set of elements	M	F
└ <dt></dt>	ISODate	M	Date when the balance was recorded.
T <txssummry></txssummry>	Set of elements	M	Summary on entries included in the statement.
TtlNtriesPer BkTxCd>	Set of elements	M	Specifies the total number and sum of entries per bank transaction code.
<pre>CdtNtries&gt;</pre>	Set of elements	M	Information on credit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field <fmly>/<cd>/ code in the field <fmly>/<cd>/ code in the field <subfmlycd>):  1) PMNT/RRCT/ESCT; 2) PMNT/RRCT/RRTN; 3) CAMT/ACCB/TOPG.</subfmlycd></cd></fmly></cd></fmly></cd></domn>
<pre><nbofntries></nbofntries></pre>	15n	M	Number of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.
L <sum></sum>	18d EUR	M	Sum of credit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.
<pre></pre>	Set of elements	M	Information on debit entries. Is indicated for the following transaction types (code in the field <domn>/<cd>/ code in the field <fmly>/<cd>/ code in the field <fmly>/<cd>/ code in the field <subfmlycd>):  1) PMNT/IRCT/ESCT; 2) PMNT/IRCT/RRTN; 3) CAMT/ACCB/SWEP.</subfmlycd></cd></fmly></cd></fmly></cd></domn>
<pre></pre> <pre><nbofntries></nbofntries></pre>	15n	M	Number of debit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.
L <sum></sum>	18d EUR	M	Sum of debit entries. If there have been no transactions of the respective type on the reporting date, zero "0" is indicated.

- SkTxCd>	Set of elements	M	Set of elements used to fully identify the
			type of underlying transaction resulting in an entry.
- <domn></domn>	Set of elements	M	
- <cd></cd>	4!a	M	Only ISO 20022 codes are allowed (Table 1).
- <fmly></fmly>	Set of elements	M	1).
- <cd></cd>	4!a	M	Only ISO 20022 codes are allowed (Table 2).
└── <subfmly cd=""></subfmly>	4!a	M	Only ISO 20022 codes are allowed (Table 3).
- <ntry></ntry>	Set of elements	С	Set of elements used to specify an entry in the report.
- <ntryref></ntryref>	35x	M	Entry reference.
— <amt></amt>	18d EUR	M	Amount.
- <cdtdbtind></cdtdbtind>	4!a	M	Indicates whether the entry is a credit or a debit entry. Code "CRDT" is used to indicate a credit entry, code "DBIT" is used to indicate a debit entry.
┬ <sts></sts>	Set of elements	M	Entry status.
└ <cd></cd>	4!a	M	Entry status code. Code "BOOK" is used.
┬ <bookgdt></bookgdt>	Set of elements	M	
└ <dttm></dttm>	ISODateTime	M	Date and time when an entry is posted to an account.
<bktxcd></bktxcd>	Set of elements	M	Set of elements used to identify the type of underlying transaction resulting in an entry.
├ <domn></domn>	Set of elements	M	
	4!a	M	Only ISO 20022 codes are allowed (Table 1).
- <fmly></fmly>	Set of elements	M	
	4!a	M	Only ISO 20022 codes are allowed (Table 2).
└ <subfmlycd></subfmlycd>	4!a	M	Only ISO 20022 codes are allowed (Table 3).
<pre>NtryDtls&gt;</pre>	Set of elements	M	Set of elements used to provide details on the entry.
- <txdtls></txdtls>	Set of elements	M	
┬ <rltdagts></rltdagts>	Set of elements	M	
→ <dbtragt></dbtragt>	Set of elements	M	Debtor agent.
FinInstn Id>	Set of elements	M	
☐ CBICFI>	4!c2!a2!c[3!c]	M	BIC of the debtor agent.
一 <cdtragt></cdtragt>	Set of elements	M	Creditor agent.
<pre></pre>	Set of elements	M	
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC of the creditor agent.
<rltddts></rltddts>	Set of elements	С	Used when <domn>/<cd> contains code "PMNT".</cd></domn>
- <accptnc dttm=""></accptnc>	ISODateTime	С	Used when <subfmlycd> contains code "ESCT".</subfmlycd>
<pre><intrbk sttlmdt=""></intrbk></pre>	ISODate	С	Used when <subfmlycd> contains code "RRTN".</subfmlycd>

5.9. Codes used in IP liquidity position report (camt.052) and statement of IP cover account (camt.053)

# Table 1

No.	Code	Explanation
1.	PMNT	Instant payment (pacs.008) and instant payment return (pacs.004).
2.	CAMT	Increase or decrease in the current IP liquidity position as a result of a liquidity
		transfer.

# Table 2

No.	Code	Explanation
1.	RRCT	Received instant payment (pacs.008) and instant payment return (pacs.004).
2.	IRCT	Sent instant payment (pacs.008) and instant payment return (pacs.004).
3.	ACCB	Increase or decrease in the current IP liquidity position as a result of a liquidity
		transfer.

# Table 3

1 4010 5		
No.	Code	Explanation
1.	ESCT	Instant payment.
2.	RRTN	Instant payment return.
3.	SWEP	Decrease in the current IP liquidity position as a result of a liquidity transfer.
4.	TOPG	Increase in the current IP liquidity position as a result of a liquidity transfer.

#### 6. Process flow of instant payment order processing

Process flows of the instant payment order processing (see Charts 3–9) depict the sequence of the instant payment service procedures.

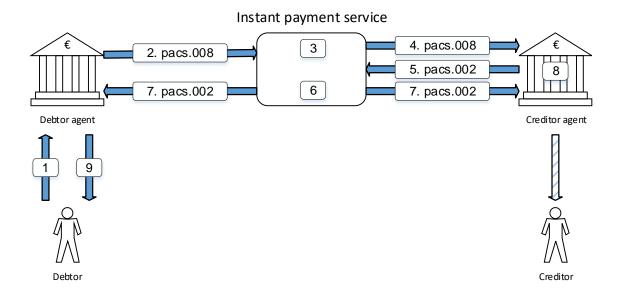


Chart 3. Successful execution of the instant payment order when the debtor agent and the creditor agent both are the EKS participants using the instant payment service.

- 1. The debtor initiates an instant payment (the EKS does not set any format requirements).
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to the creditor agent.
- 5. The creditor agent confirms (pacs.002) that the instant payment can be credited to the creditor's account.
- 6. The instant payment service uses the funds reserved on the debtor agent's instant payment liquidity position to increase the creditor agent's instant payment liquidity position.
- 7. The instant payment service sends the debtor agent and the creditor agent a confirmation (pacs.002) of the instant payment execution.
- 8. The creditor agent credits the creditor's account.
- 9. The debtor agent sends its customer a confirmation that funds have been credited to the creditor's account.

# Instant payment service 2. pacs.008 4. pacs.008 7. pacs.002 Debtor agent Creditor agent Creditor agent

Chart 4. Rejection of the instant payment order when the debtor agent and the creditor agent both are the EKS participants using the the instant payment service

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to the creditor agent.
- 5. The creditor agent sends a notification (pacs.002) that the payment cannot be credited to the creditor's account.
- 6. The instant payment service cancels the reservation on debtor agent's instant payment liquidity position.
- 7. The instant payment service sends a rejection (pacs.002) to the debtor agent.
- 8. The debtor agent sends its customer information on the payment rejection.

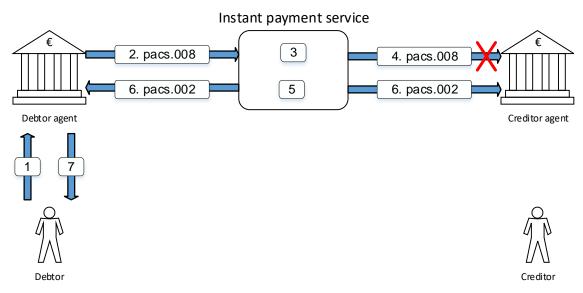


Chart 5. Rejection of the instant payment order because of a time-out when the debtor agent and the creditor agent both are the EKS participants using the instant payment service

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to the creditor agent, but due to technical reasons the creditor agent fails to receive the message.
- 5. Within the pre-defined period of time (20 seconds), the instant payment service has not received a reply, it rejects the instant payment and cancels the reservation of the instant payment liquidity position.
- 6. The instant payment service sends the debtor agent and the creditor agent a notification (pacs.002) of the instant payment rejection.
- 7. The debtor agent sends its customer information on the instant payment rejection.

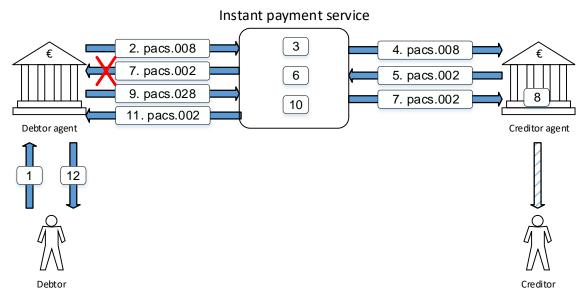


Chart 6. Instant payment status investigation (instant payment order has been executed) when the debtor agent and the creditor agent both are the EKS participants using the instant payment service

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to the creditor agent.
- 5. The creditor agent confirms (pacs.002) that the instant payment can be credited to the creditor's account.
- 6. The instant payment service uses the funds reserved on the debtor agent's instant payment liquidity position to increase the creditor agent's instant payment liquidity position.
- 7. The instant payment service sends the debtor agent and the creditor agent a confirmation (pacs.002) of the instant payment execution.
- 8. The creditor agent credits the creditor's account.
- 9. The debtor agent has not received a reply within the pre-defined time period (25 seconds) and sends a payment status investigation message (pacs.028) to the instant payment service.

- 10. The instant payment service checks whether the instant payment has been executed.
- 11. The instant payment service sends the debtor agent information (pacs.002) that the instant payment has been executed.
- 12. The debtor agent sends its customer information that the instant payment has been executed.

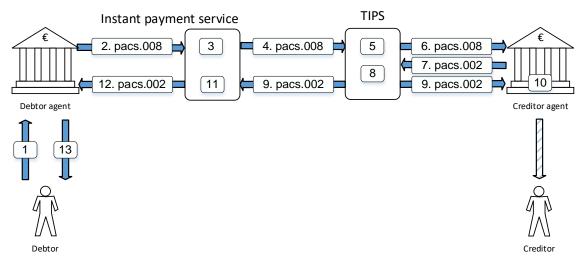


Chart 7. Execution of an instant payment order addressed to a TIPS participant with the settlement on IP cover account.

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to TIPS.
- 5. TIPS verifies the instant payment and reserves the respective amount of the liquidity.
- 6. TIPS sends the instant payment message (pacs.008) to the creditor agent.
- 7. The creditor agent confirms (pacs.002) that the instant payment can be credited to the creditor's account.
- 8. TIPS uses the reserved liquidity to increase the creditor agent's TIPS DCA balance.
- 9. TIPS sends the debtor agent and the creditor agent a confirmation (pacs.002) of the instant payment execution.
- 10. The creditor agent credits the creditor's account.
- 11. The instant payment service uses the funds reserved on the instant payment liquidity position to increase TIPS liquidity position.
- 12. The instant payment service sends the debtor agent information (pacs.002) that the instant payment has been executed.
- 13. The debtor agent sends its customer information that the instant payment has been executed.

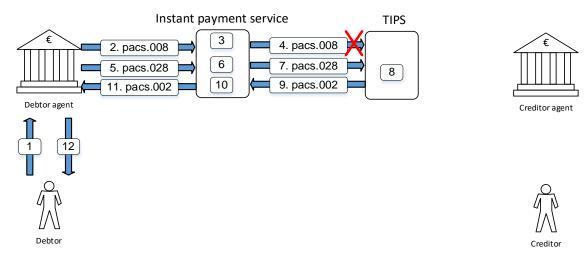


Chart 8. Processing of an instant payment order addressed to a TIPS participant involving the sending of an instant payment status investigation message (the instant payment order has not been executed).

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message and reserves the respective amount of the debtor agent's instant payment liquidity position.
- 4. The instant payment service sends the instant payment message (pacs.008) to TIPS which does not receive it (in this case, the instant payment service service does not reject the instant payment within 20 seconds).
- 5. The debtor agent has not received a reply within the pre-defined time period (25 seconds) and sends an instant payment status investigation message (pacs.028) to the instant payment service.
- 6. The instant payment service checks whether a reply regarding the respective instant payment message has been received from TIPS.
- 7. The instant payment service sends the instant payment status investigation message (pacs.028) to TIPS.
- 8. TIPS conducts an instant payment search.
- 9. TIPS sends a message (pacs.002) informing that the instant payment has not been received.
- 10. The instant payment service cancels the reservation of funds on the debtor agent's instant payment liquidity position.
- 11. The instant payment service sends the debtor agent a message (pacs.002) informing that the instant payment has not been executed.
- 12. The debtor agent and the creditor agent send their customers information that the instant payment has not been executed.

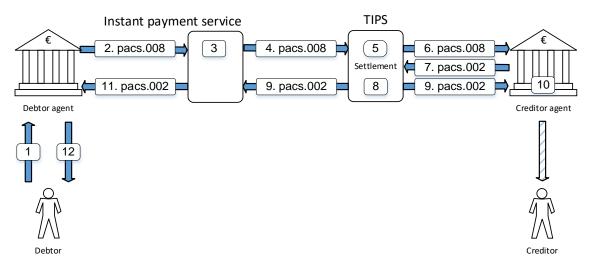


Chart 9. Processing of an instant payment order addressed to a TIPS participant with the settlement on participant's TIPS DCA.

- 1. The debtor initiates an instant payment.
- 2. The debtor agent sends an instant payment message (pacs.008) to the instant payment service.
- 3. The instant payment service validates the instant payment message.
- 4. The instant payment service sends the instant payment message (pacs.008) to TIPS.
- 5. TIPS verifies the instant payment and reserves the respective amount of the liquidity on participant's TIPS DCA.
- 6. TIPS sends the instant payment message (pacs.008) to the creditor agent.
- 7. The creditor agent confirms (pacs.002) that the instant payment can be credited to the creditor's account.
- 8. TIPS uses the reserved liquidity to increase the creditor agent's TIPS DCA balance.
- 9. TIPS sends the instant payment service and the creditor agent a confirmation (pacs.002) of the instant payment execution.
- 10. The creditor agent credits the creditor's account.
- 11. The instant payment service sends the debtor agent information (pacs.002) that the instant payment has been executed.
- 12. The debtor agent sends its customer information that the instant payment has been executed.

# 7. Process flow of instant payment cancellation request, instant payment return order and instant payment resolution of investigation processing

Process flow of instant payment cancellation request, instant payment return order and instant payment resolution of investigation processing (see Charts 10–13) depict the sequence of the instant payment service procedures.

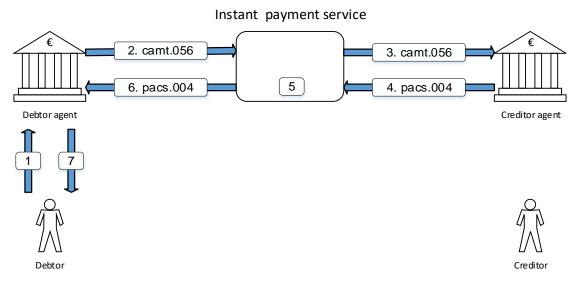


Chart 10. Successful execution of the instant payment cancellation request resulting in receiving of the refund when the debtor agent and the creditor agent both are the EKS participants using the instant payment service

- 1. The debtor or the debtor agent initiates an instant payment order cancellation.
- 2. The debtor agent sends an instant payment cancellation request message (camt.056) to the instant payment service.
- 3. The instant payment service sends the instant payment cancellation request message (camt.056) to the creditor agent.
- 4. The creditor agent sends an instant payment return message (pacs.004).
- 5. The instant payment service processes the instant payment return message (pacs.004), decreases the creditor agent's instant payment liquidity position and increases the debtor agent's instant payment liquidity position.
- 6. The instant payment service sends the instant payment return message (pacs.004) to the debtor agent.
- 7. The debtor agent credits its customer's account and informs the customer that the refund of instant payment has been credited to its account.

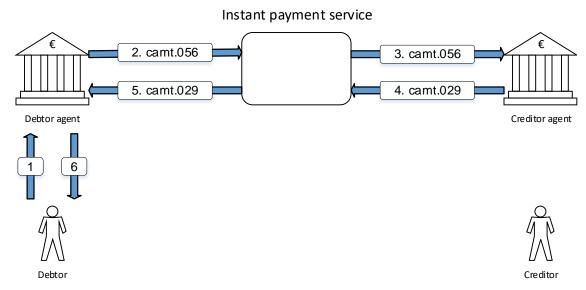


Chart 11. Successful execution of the instant payment cancellation request resulting in receiving of instant payment resolution of investigation message when the debtor agent and the creditor agent both are the EKS participants using the instant payment service

- 1. The debtor or the debtor agent initiates an instant payment order cancellation.
- 2. The debtor agent sends an instant payment cancellation request message (camt.056) to the instant payment service.
- 3. The instant payment service sends the instant payment cancellation request message (camt.056) to the creditor agent.
- 4. The creditor agent sends an instant payment resolution of investigation message (camt.029).
- 5. The instant payment service sends the instant payment resolution of investigation message (camt.029) to the debtor agent.
- 6. The debtor agent sends its customer the information on the negative response to the cancellation request.

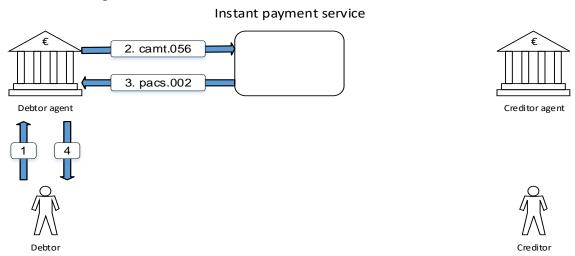


Chart 12. Unsuccessful submission of an instant payment cancellation request

- 1. The debtor or the debtor agent initiates an instant payment order cancellation.
- 2. The debtor agent sends an instant payment cancellation request message (camt.056) to the instant payment service.
- 3. The instant payment service detects an error and sends an error message (pacs.002) to the debtor agent.

4. The sending of the error message to the customer is not mandatory. The agents may inform their customer in line with their internal procedures.

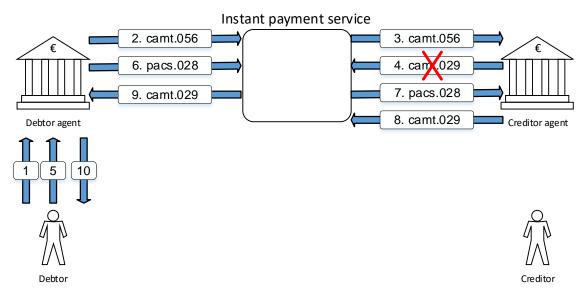


Chart 13. Sending an instant payment cancellation request and an instant payment status investigation request

- 1. The debtor initiates an instant payment order cancellation.
- 2. The debtor agent sends an instant payment cancellation request message (camt.056) to the instant payment service.
- 3. The instant payment service sends the instant payment cancellation request message (camt.056) to the creditor agent.
- 4. The creditor agent sends an instant payment resolution of investigation message (camt.029), but the instant payment service does not receive it.
- 5. In the absence of a reply, the debtor agent initiates sending of an instant payment status investigation request.
- 6. The debtor agent sends an instant payment status investigation request message (pacs.028) to the instant payment service.
- 7. The instant payment service sends the instant payment status investigation message to the creditor agent.
- 8. The creditor agent sends an instant payment resolution of investigation message (camt.029).
- 9. The instant payment service sends the instant payment resolution of investigation message (camt.029) to the debtor agent.
- 10. The debtor agent sends its customer the information on the negative response to the cancellation request..

# 8. Generating messages

# 8.1. Instant payment message (pacs.008.001.08)

An instant payment message shall be generated in accordance with ISO 20022 pacs.008.001.08 message.

## Structure of the message

Element	Format or data type	Sta-	Description	Notes
		tus		
<pre>- <lbfastcdttrf></lbfastcdttrf></pre>	Set of elements			
→ <fitoficstmrcdttrf></fitoficstmrcdttrf>	Set of elements	M		
	Set of elements	M	Credit transfer message bulk information	One occurrence of the element is allowed.
CdtTrfTxInf>	Set of elements	M	Credit transfer message information	One occurrence of the element is allowed.
Signature>	Set of elements	M	Signature	One occurrence of the element is allowed.

## Bulk header

El	ement	Format or data type	Sta- tus	Description	Notes
	<pre><grphdr></grphdr></pre>	Set of elements	M	Instant payment message bulk information	One occurrence of the element is allowed.
	- <msgid></msgid>	35x	M	Bulk identifier	Must be used as specified in Paragraph 4.2 herein.
	- <credttm></credttm>	ISODateTime	M	Date and time of bulk creation	
	- <nboftxs></nboftxs>	15n	M	Number of instant payment messages in the bulk	Number of instant payment messages in the bulk. Only value "1" is allowed.
< 7	-   TtlIntrBkSttlmAmt> 	18d EUR	M	Amount of instant payment messages in the bulk	Must be equal to the total amount of all instant payment messages in the bulk.
	- <intrbksttlmdt></intrbksttlmdt>	ISODate	M	Value date	
	<pre></pre>	Set of elements	M		
	<pre>SttlmMtd&gt;</pre>	Code	M	Settlement method	Only ISO 20022 codes are allowed (Table 11).

T <sttlmacct></sttlmacct>	Set of elements	О	Settlement account	
	Set of elements	M		
<pre> <iban></iban></pre>	2!a2!n30x	{Or	IBAN	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <othr>.</othr>
<0thr>	Set of elements	Or}	Other type of identification	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <iban>.</iban>
— <id></id>	34x	M	Identifier	
<pre> &lt; SchmeNm&gt;</pre>	Set of elements	О	Scheme name	
	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 9). Cannot be used at the same time as <prtry>.</prtry>
CPrtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
☐ <issr></issr>	35x	О	Issuer of identifier	
ClrSys>	Set of elements	О		
- <cd></cd>	Code	{Or		Only ISO 20022 codes are allowed (Table 4). Cannot be used at the same time as <prtry>.</prtry>
- <prtry></prtry>	Code	Or}	Clearing system proprietary code	Cannot be used at the same time as <cd>.</cd>
<pre>T <pmttpinf></pmttpinf></pre>	Set of elements	M	Payment type information	
SvcLvl>	Set of elements	M	Service level	
	Code	M	Code	Only code "SEPA" is allowed.
<pre> <lclinstrm></lclinstrm></pre>	Set of elements	M	User community specific instrument information	
< Cd>	Code	M	Code	Only code "INST" is allowed.
CtgyPurp>	Set of elements	О	Category code	
- <cd></cd>	Code	{Or		Only ISO 20022 codes are allowed (Table 5). Cannot be used at the same time as <prtry>.</prtry>
- <prtry></prtry>	35x	Or}		Cannot be used at the same time as <cd>.</cd>
- <instgagt></instgagt>	Set of elements	M	Instructing agent	The participant BIC shall be indicated in the messages to be sent to the instant payment service. The agent who submitted the message to the instant payment service is indicated in the messages received from the instant payment service.
FinInstnId>	Set of elements	M		
└ <bicfi></bicfi>	4! c2!a2!c	M	BIC of the Instructing Agent	
<instdagt></instdagt>	Set of elements	M	Instructed Agent	The BIC of Latvijas Banka shall be indicated in the messages to be sent to the instant payment service. The participant BIC is indicated in the messages received from the instant payment service.
- <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	4! c2!a2!c	M	BIC of the Instructed Agent	

### Instant payment message structure

Format or data	Sta-	Description	Notes
			One occurrence of the element is allowed.
		· ·	
35x	О	Instruction identification	Assigned by the instructing agent of the instant payment. Must be used as specified in Paragraph 4.2 herein.
35x	M	Identification assigned by the debtor	Where it is not available, only value "NOTPROVIDED" is allowed. Must be used as specified in Paragraph 4.2 herein.
35x	M	Message identification	Assigned by the debtor agent. Must be used as specified in Paragraph 4.2 herein.
18d EUR	M	Interbank settlement amount	
ISODateTime	M	Time stamp of instant payment message acceptance	
Code	M	Charge bearer	Only code "SLEV" is allowed.
Set of elements	О	Ultimate debtor	
70x	О	Name	
Set of elements	M	Ultimate debtor identification	
Set of elements	{Or	Organisation identification	Cannot be used at the same time as <prvtid>.</prvtid>
4!c2!a2!c[3!c]	{Or	BIC	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <lei> or <othr>.</othr></lei>
18!c2!n	Or	LEI code	Cannot be used at the same time as <anybic> or <othr>.</othr></anybic>
Set of elements	Or}	Other type of identification	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <anybic> or <lei>.</lei></anybic>
35x	M	Identifier	
Set of elements	О	Scheme name	
Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 6). Cannot be used at the same time as <prtry>.</prtry>
35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
	type Set of elements Set of elements 35x  35x  35x  18d EUR ISODateTime  Code Set of elements 70x Set of elements 4!c2!a2!c[3!c]  18!c2!n  Set of elements  25x Set of elements Code	type tus  Set of elements M  Set of elements M  35x O  35x M  18d M  EUR  ISODateTime M  Code M  Set of elements O  70x O  Set of elements M  Set of elements O  4!c2!a2!c[3!c] {Or  18!c2!n Or  Set of elements Or}  Set of elements Or  4!c2!a2!c[3!c] {Or	type tus

└ <issr></issr>	35x	О	Issuer of identifier	
T <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Cannot be used at the same time as <orgid>.</orgid>
<pre></pre>	Set of elements	О	Date and place of birth	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <othr>.</othr>
- <birthdt></birthdt>	ISODate	M	Date of birth	
- <prvcofbirth></prvcofbirth>	35x	О	Province of birth	
- <cityofbirth></cityofbirth>	35x	M	City of birth	
<pre>CtryOfBirth&gt;</pre>	2!a	M	Country of Birth	Only ISO 3166 Alpha-2 codes are allowed.
	Set of elements	О	Other type of identification	Cannot be used at the same time as <pre><dtandplcofbirth>.</dtandplcofbirth></pre>
— <id></id>	35x	M	Identifier	
T <schmenm></schmenm>	Set of elements	0	Scheme name	
— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 7). Cannot be used at the same time as <prtry>.</prtry>
└─ <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
└ <issr></issr>	35x	О	Issuer of identifier	
T <dbtr></dbtr>	Set of elements	M	Debtor	
— <nm></nm>	70x	M	Debtor name	
<pre>PstlAdr&gt;</pre>	Set of elements	O	Address	According to SCT Inst Inter-PSP IG:  1) Address of the Originator is mandatory when the Originator PSP or the Beneficiary PSP is located in a non-EEA SEPA country or territory. A combination of <adrline> and <ctry> is recomended;  2) If <adrline> is not used then at least <twnnm> and <ctry> must be used;  3) Not allowed to use <adrline> then <pstladr> sub-elements other than <ctry> are not allowed.</ctry></pstladr></adrline></ctry></twnnm></adrline></ctry></adrline>
- <dept></dept>	70x	О	Department	
SubDept>	70x	0	Sub Department	
<pre> <strtnm></strtnm></pre>	70x	0	Street Name	
<pre></pre>	16x	0	Building Number	
- <bldgnm></bldgnm>	35x	О	Building Name	
- <flr></flr>	70x	0	Floor	
- <pstbx></pstbx>	16x	0	Post Box	
- <room></room>	70x	О	Room	
PstCd>	16x	О	Post Code	

	- <twnnm></twnnm>	35x	О	Town Name	
	- <twnlctnnm></twnlctnnm>	35x	0	Town Location Name	
	- <dstrctnm></dstrctnm>	35x	0	District Name	
	- <ctrysubdvsn></ctrysubdvsn>	35x	О	Country Sub Division	
	- <ctry></ctry>	2!a	О	Country	Only ISO 3166 Alpha-2 codes are allowed.
	- <adrline></adrline>	70x	О	Address line	No more than two occurrences of the element are allowed.
TH	<id></id>	Set of elements	О	Debtor identification	
	<pre><orgid></orgid></pre>	Set of elements	{Or	Organisation identification	Cannot be used at the same time as <prvtid>.</prvtid>
	— <anybic></anybic>	4!c2!a2!c[3!c]	{Or	BIC	Cannot be used at the same time as <lei> un <othr>.</othr></lei>
	- <lei></lei>	18!c2!n	Or	LEI code	Cannot be used at the same time as <anybic> or <othr>.</othr></anybic>
	<0thr>	Set of elements	Or}	Other type of identification	Cannot be used at the same time as <anybic> or <lei>.</lei></anybic>
	— <id></id>	35x	M	Identifier	
	T <schmenm></schmenm>	Set of elements	О	Scheme name	
	— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 6). Cannot be used at the same time as <prtry>.</prtry>
	- <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
Ť	L <issr></issr>	35x	O	Issuer of identifier	
-	r <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Cannot be used at the same time as <orgid>.</orgid>
	<pre><dtandplcofbirth></dtandplcofbirth></pre>	Set of elements	O	Date and place of birth	Cannot be used at the same time as <othr>.</othr>
	- <birthdt></birthdt>	ISODate	M	Date of birth	
	- <prvcofbirth></prvcofbirth>	35x	О	Province of birth	
	- <cityofbirth></cityofbirth>	35x	M	City of birth	
	<pre><ctryofbirth></ctryofbirth></pre>	2!a	M	Country of birth	Only ISO 3166 Alpha-2 codes are allowed.
	<othr></othr>	Set of elements	О	Other type of identification	Cannot be used at the same time as <pre><dtandplcofbirth>.</dtandplcofbirth></pre>
	— <id></id>	35x	M	Identifier	
	T <schmenm></schmenm>	Set of elements	0	Scheme name	
	— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 7). Cannot be used at the same time as <prtry>.</prtry>

- <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
- <issr></issr>	35x	0	Issuer of identifier	
→ <dbtracct></dbtracct>	Set of elements	M	Debtor account	
- <id></id>	Set of elements	M	Debtor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
<prxy></prxy>	Set of elements	0	Proxy	According to SCT Inst Inter-PSP IG, can only be provided here under the condition that the Originator is given the possibility to validate the IBAN linked to that Proxy, prior to the authentication of the instruction unless the Originator and the Originator PSP agreed upfront on another arrangement. Furthermore, the Originator PSP must have an agreement with the Originator and the Beneficiary PSP with the Beneficiary in relation to the treatment and the use of the data provided under such Alias/Proxy i.e. whether it is to be used for the purpose to initiate the transaction and/or to forward it to the Beneficiary PSP and/or the Beneficiary concerned.
<tp></tp>	Set of elements	О	Proxy type	
— <cd></cd>	4x	{Or	Proxy type code	
- <prtry></prtry>	35x	Or}	Proxy type	
└ <id></id>	320x	M	Proxy ID	
→ <dbtragt></dbtragt>	Set of elements	M	Debtor agent	
T <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	The specified BIC shall be available in the routing table.
┬ <cdtragt></cdtragt>	Set of elements	M	Creditor agent	
<pre><fininstnid></fininstnid></pre>	Set of elements	M	Financial institution identification	
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	The specified BIC shall be available in the routing table.
┬ <cdtr></cdtr>	Set of elements	M	Creditor	
- <nm></nm>	70x	M	Creditor name	
- <pstladr></pstladr>	Set of elements	О	Address	According to SCT Inst Inter-PSP IG:  1) If <adrline> is not used then at least <twnnm> and <ctry> must be used;</ctry></twnnm></adrline>

				2) Not allowed to use <adrline> then <pstladr></pstladr></adrline>
				sub-elements other than <ctry> are not allowed.</ctry>
- <dept></dept>	70x	О	Department	
- <subdept></subdept>	70x	О	Sub Department	
- <strtnm></strtnm>	70x	О	Street Name	
- <bldgnb></bldgnb>	16x	О	Building Number	
- <bldgnm></bldgnm>	35x	О	Building Name	
- <flr></flr>	70x	О	Floor	
- <pstbx></pstbx>	16x	О	Post Box	
<room></room>	70x	О	Room	
- <pstcd></pstcd>	16x	О	Post Code	
- <twnnm></twnnm>	35x	О	Town Name	
- <twnlctnnm></twnlctnnm>	35x	О	Town Location Name	
- <dstrctnm></dstrctnm>	35x	О	District Name	
- <ctrysubdvsn></ctrysubdvsn>	35x	О	Country Sub Division	
- <ctry></ctry>	2!a	О	Country	Only ISO 3166 Alpha-2 codes are allowed.
<pre>AdrLine&gt;</pre>	70x	О	Address line	No more than two occurrences of the element are allowed.
<id></id>	Set of elements	О	Creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Cannot be used at the same time as <prvtid>.</prvtid>
- <anybic></anybic>	4!c2!a2!c[3!c]	О	BIC	Cannot be used at the same time as <lei> or</lei>
				<othr>.</othr>
- <lei></lei>	18!c2!n	Or	LEI code	
<pre> &lt; Othr&gt;</pre>	Set of elements	О	Other type of identification	Cannot be used at the same time as <anybic> vai <lei>.</lei></anybic>
— <id></id>	35x	M	Identifier	
T <schmenm></schmenm>	Set of elements	О	Scheme name	
— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 6). Cannot be used at the same time as <prtry>.</prtry>
<prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
- <issr></issr>	35x	O	Issuer of identifier	
T <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Cannot be used at the same time as <orgid>.</orgid>
	Set of elements	O	Date and place of birth	Cannot be used at the same time as <0thr>.
- <birthdt></birthdt>	ISODate	M	Date of birth	
- <prvcofbirth></prvcofbirth>	35x	0	Province of birth	
- <cityofbirth></cityofbirth>	35x	M	City of birth	

CtryOfBirth>	2!a	M	Country of birth	Only ISO 3166 Alpha-2 codes are allowed.
<othr></othr>	Set of elements	О	Other type of identification	Cannot be used at the same time as <pre><dtandplcofbirth>.</dtandplcofbirth></pre>
— <id></id>	35x	M	Identifier	
T <schmenm></schmenm>	Set of elements	О	Scheme name	
— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 7). Cannot be used at the same time as <prtry>.</prtry>
- <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>
- <issr></issr>	35x	О	Issuer of identifier	
T <cdtracct></cdtracct>	Set of elements	M	Creditor account	
T <id></id>	Set of elements	M	Creditor account identification	
L <iban></iban>	2!a2!n30x	M	IBAN	
<pre><prxy></prxy></pre>	Set of elements	0	Proxy	According to SCT Inst Inter-PSP IG, can only be provided here under the condition that the Originator is given the possibility to validate the IBAN linked to that Proxy, prior to the authentication of the instruction unless the Originator and the Originator PSP agreed upfront on another arrangement. Furthermore, the Originator PSP must have an agreement with the Originator and the Beneficiary PSP with the Beneficiary in relation to the treatment and the use of the data provided under such Alias/Proxy i.e. whether it is to be used for the purpose to initiate the transaction and/or to forward it to the Beneficiary PSP and/or the Beneficiary concerned.
	Set of elements	О	Proxy type	
\	4x	{Or	Proxy type code	Cannot be used at the same time as <prtry>.</prtry>
☐ <prtry></prtry>	35x	Or}	Proxy type	Cannot be used at the same time as <cd>.</cd>
└ <id></id>	320x	M	Proxy ID	
┬ <ultmtcdtr></ultmtcdtr>	Set of elements	O	Ultimate creditor	
— <nm></nm>	70x	О	Name	
├ <b>-</b> <id></id>	Set of elements	M	Ultimate creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Cannot be used at the same time as <prvtid>.</prvtid>
- <anybic></anybic>	Identifier	{Or	BIC	Cannot be used at the same time as <lei> or <othr>.</othr></lei>
- <lei></lei>	18!c2!n	Or	LEI code	Cannot be used at the same time as <anybic> or <othr>.</othr></anybic>

	T <othr></othr>	Set of elements	Or}	Other type of identification	Cannot be used at the same time as <anybic> or</anybic>		
	1				<lei>.</lei>		
	— <id></id>	35x	M	Identifier			
	→ <schmenm></schmenm>	Set of elements	О	Scheme name			
	- <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 6). Cannot be used at the same time as <prtry>.</prtry>		
	│└ <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>		
	L <issr></issr>	35x	О	Issuer of identifier			
	- <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Cannot be used at the same time as <orgid>.</orgid>		
	<pre></pre>	Set of elements	О	Date and place of birth	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <0thr>>.		
	— <birthdt></birthdt>	ISODate	M	Date of birth			
	- <prvcofbirth></prvcofbirth>	35x	О	Province of birth			
	<pre>- <cityofbirth></cityofbirth></pre>	35x	M	City of birth			
	<pre>CtryOfBirth&gt;</pre>	2!a	M	Country of birth	Only ISO 3166 Alpha-2 codes are allowed.		
	<othr></othr>	Set of elements	О	Other type of identification	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <pre><pre><pre><pre>According to SCT Inst Inter-PSP IG, cannot be used at the same time as <pre><pre><pre><pre><pre><pre><pre></pre></pre></pre></pre></pre></pre></pre></pre></pre></pre></pre>		
	— <id></id>	35x	M	Identifier			
	T <schmenm></schmenm>	Set of elements	О	Scheme name			
	— <cd></cd>	Code	{Or	Scheme name code	Only ISO 20022 codes are allowed (Table 7). Cannube used at the same time as <prtry>.</prtry>		
	└─ <prtry></prtry>	35x	Or}	Scheme name	Cannot be used at the same time as <cd>.</cd>		
i	└ <issr></issr>	35x	O	Issuer of identifier			
————	(Purp>	Set of elements	O	Payment purpose			
	<cd></cd>	Code	M	Payment purpose ISO code	Only ISO 20022 codes are allowed (Table 8).		
<del>Г</del> , «	<pre><rmtinf></rmtinf></pre>	Set of elements	О	Remittance information			
<u> </u>	<ustrd></ustrd>	140x	{Or	Unstructured	Cannot be used at the same time as <strd>.</strd>		
	<strd></strd>	Set of elements	Or}	Structured	Cannot be used at the same time as <ustrd>. Only one occurrence of element is allowed with a maximum of 140 characters.</ustrd>		
L-	<pre>CdtrRefInf&gt;</pre>	Set of elements	О	Creditor reference information			
	T <tp></tp>	Set of elements	О	Creditor reference information type			
	T <cdorprtry></cdorprtry>	Set of elements	M				
	Cd>	Code	M	Creditor reference information type code	Only code "SCOR" is allowed. Allowed to use only with <ref>.</ref>		
	└ <issr></issr>	35x	О	Issuer of creditor reference information type.			
	— <ref></ref>	35x	0	Saņēmēja piešķirta maksājuma reference	4.4 . 4.4		

# 8.2. Instant payment return message (pacs.004.001.09)

An instant payment return message shall be generated in accordance with ISO 20022 pacs.004.001.09 message.

Structure of the message

Element	Format or data	Sta-	Description	Notes
	type	tus		
<pre>LBFastPmtRtr&gt;</pre>	Set of elements			
- <pmtrtr></pmtrtr>	Set of elements	M		
T <grphdr></grphdr>	Set of elements	M	Instant payment return message bulk	One occurrence of the element is allowed.
			information	
T <orgnlgrpinf></orgnlgrpinf>	Set of elements	C	Information on the original bulk	One occurrence of the element is allowed.
TxInf>	Set of elements	M	Message information	One occurrence of the element is allowed.
└┬ <signature></signature>	Set of elements	M	Signature	One occurrence of the element is allowed.

Element	Format or data	Sta-	Description	Notes
	type	tus		
<pre><grphdr></grphdr></pre>	Set of elements	M	Instant payment return message bulk information	One occurrence of the element is allowed.
- <msgid></msgid>	35x	M	Bulk identifier	Must be used as specified in Paragraph 4.2 herein.
- <credttm></credttm>	ISODateTime	M	Date and time of bulk creation	
- <nboftxs></nboftxs>	15n	M	Number of instant payment return messages in the bulk	Must be equal to the actual number of instant payment return messages in the bulk. Only value "1" is allowed.
<pre>- <ttlrtrdintrbk< td=""><td>18d EUR</td><td>M</td><td>Amount of instant payment return messages in the bulk</td><td>Must be equal to the total amount of all instant payment return messages in the bulk.</td></ttlrtrdintrbk<></pre>	18d EUR	M	Amount of instant payment return messages in the bulk	Must be equal to the total amount of all instant payment return messages in the bulk.
- <intrbksttlmdt></intrbksttlmdt>	ISODate	M	Value date	
	Set of elements	M		
<pre><sttlmmtd></sttlmmtd></pre>	Code	M	Settlement method	Only ISO 20022 codes are allowed (Table 11).
- <sttlmacct></sttlmacct>	Set of elements	О	Settlement account	

	_ <id></id>	Set of elements	M	Settlement Account	
	- <iban></iban>	2!a2!n30x	{Or	Identifier	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <0thr>.
	<pre><othr></othr></pre>	Set of elements	Or}	IBAN	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <iban>.</iban>
	— <id></id>	34x	M	Other identifier of the settlement account	
	→ <schmenm></schmenm>	Set of elements	О	Identifier	
	— <cd></cd>	Code	{Or	Scheme name	Only ISO 20022 codes are allowed (Table 9). Cannot be used at the same time as <prtry>.</prtry>
	- <prtry></prtry>	35x	Or}	Scheme name code	Cannot be used at the same time as <cd>.</cd>
	└ <issr></issr>	35x	О	Scheme name	
	- <clrsys></clrsys>	Set of elements	О	Issuer of identifier	
	— <cd></cd>	Code	{Or	Clearing system ISO code	Only ISO 20022 codes are allowed (Table 4). Cannot be used at the same time as <prtry>.</prtry>
	- <prtry></prtry>	Code	Or}	Clearing system proprietary code	Cannot be used at the same time as <cd>.</cd>
*	<pre><instgagt></instgagt></pre>	Set of elements	M	Instructing agent	The participant BIC shall be indicated in the messages to be sent to the instant payment service. The agent who submitted the message to the instant payment service is indicated in the messages received from the instant payment service.
丁 	<fininstnid></fininstnid>	Set of elements	M		
	- <bicfi></bicfi>	4!c2!a2!c	M	BIC of the instructing agent	
	<instdagt></instdagt>	Set of elements	M	Instructed agent	The BIC of Latvijas Banka shall be indicated in the messages to be sent to the instant payment service. The participant BIC is indicated in the messages received from the instant payment service.
	<fininstnid></fininstnid>	Set of elements	M		
L	- <bicfi></bicfi>	4!c2!a2!c	M	BIC of the instructed agent	

# Bulk header of the original message structure

<pre></pre>	Set of elements	С	Information on the original bulk	According to SCT Inst Inter-PSP IG, "Original Group Information" elements shall be present in either "Bulk header of the original message" section or in "Instant payment return message".
- <orgnlmsgid></orgnlmsgid>	35x	M	Message identifier of the original bulk	Must be used as specified in Paragraph 4.2 herein.
└ <orgnlmsgnmid></orgnlmsgnmid>	35x	M	Type of messages in the original bulk	Code "pacs.008.001.08" shall be used in messages to be sent to the instant payment service. If original pacs.008 was sent before migration to ISO 20022 2019 version, code "pacs.008.001.02" can be used. EKS IP service does not check the correspondence of this value with respect to the version of the original message.

Instant payment return message structure

T <txinf></txinf>	Set of elements	M	Message information	One occurrence of the element is allowed.
- <rtrid></rtrid>	35x	M	Instant payment return message identifier	Must be used as specified in Paragraph 4.2 herein.
<pre></pre>	Set of elements	С	Information on the original bulk	According to SCT Inst Inter-PSP IG, "Original Group Information" elements shall be present in either "Bulk header of the original message" section or in "Instant payment return message".
- <orgnlmsgid></orgnlmsgid>	35x	M	Message identifier of the original bulk	Must be used as specified in Paragraph 4.2 herein.
└ <orgnlmsgnmid></orgnlmsgnmid>	Code	M	Type of messages in the original bulk	Code "pacs.008.001.08" shall be used in messages to be sent to the instant payment service. If original pacs.008 was sent before migration to ISO 20022 2019 version, code "pacs.008.001.02" can be used. EKS IP service does not check the correspondence of this value with respect to the version of the original message.
- <orgnlinstrid></orgnlinstrid>	35x	О	Original instruction identification	Mandatory if included in the original message. Must be used as specified in Paragraph 4.2 herein.
- <orgnlendtoendid></orgnlendtoendid>	35x	M	Original identification assigned by the debtor	Must be used as specified in Paragraph 4.2 herein.
- <orgnltxid></orgnltxid>	35x	M	Original message identification	Must be used as specified in Paragraph 4.2 herein.
- <orgnlintrbksttlmamt></orgnlintrbksttlmamt>	18d EUR	M	Original interbank settlement amount	

<rtrdintrbksttlmamt></rtrdintrbksttlmamt>	18d	M	Returned interbank settlement	
	EUR		amount	
<rtrdinstdamt></rtrdinstdamt>	18d	О	Returned instructed amount before	
	EUR		deduction of charges	
— <chrgbr></chrgbr>	Code	О	Charge bearer	Only code "SLEV" is allowed.
<pre><chrgsinf></chrgsinf></pre>	Set of elements	О	Charges information	Only allowed in messages responding to an instant
	10.1	M	Charact	payment cancellation request.
Ame	18d EUR	IVI	Charged amount	
└┬ <agt></agt>	Set of elements	M	Party deducting charges	
├ <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
-T <instgagt></instgagt>	Set of elements	О	Agent sending the payment	
			cancellation request message	
├ <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
T <instdagt></instdagt>	Set of elements	О	Agent receiving the payment	
			cancellation request message	
ー 〈FinInstnId〉	Set of elements	M		
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
T <rtrrsninf></rtrrsninf>	Set of elements	M	Return reason information	
├┬ <orgtr></orgtr>	Set of elements	M	Party originating the return	
— <nm></nm>	70x	О	Name of the party originating the	
			return where it is a customer	
<del>                                </del>	Set of elements	О	Party originating the return where	
			it is an agent	
	Set of elements	M		
│	4!c2!a2!c[3!c]	M	The BIC of the party originating	
			the return	
Rsn>	Set of elements	M	Return reason	
	Code	M	Return reason code	Only code "FOCR" is allowed.

└ <addtlinf></addtlinf>	105x	M	Additional information	According to SCT Inst Inter-PSP IG:  1) in case of answer to recall initiated by the Originator PSP, element shall be filled-in with the code "ATR053/" followed by the instant payment cancellation request message identification indicated in camt.056 (field <cxiid>);  2) in case of answer to a recall initiated by the Originator a Recall code "ATR072/" shall be used, followed by the instant payment cancellation request message identification indicated in camt.056 (element <cxiid>).</cxiid></cxiid>
<pre>Cycle &lt;</pre>	Set of elements	M	Information on the original message	According to SCT Inst Inter-PSP IG, sub-elements should contain an exact copy of elements of the received pacs.008. Sub-elements are validated only against xml schema.
- <intrbksttlmdt></intrbksttlmdt>	ISODate	О	Value date	
<pre> &lt; SttlmInf&gt;</pre>	Set of elements	О		
<pre>SttlmMtd&gt;</pre>	Code	О	Settlement method	
	Set of elements	О	Settlement account	Sub-element structure must be aligned with pacs.008.001.08.
ClrSys>	Set of elements	О	Identification of the clearing system	Sub-element structure must be aligned with pacs.008.001.08.
T <pmttpinf></pmttpinf>	Set of elements	О		
- <svclvl></svclvl>	Set of elements	О	Service Level	Sub-element structure must be aligned with pacs.008.001.08.
- <lclinstrm></lclinstrm>	Set of elements	О	User community specific instrument information	Sub-element structure must be aligned with pacs.008.001.08.
CtgyPurp>	Code	О	Category purpose	Sub-element structure must be aligned with pacs.008.001.08.
┬ <rmtinf></rmtinf>	Set of elements	О	Remittance Information	
├─ <ustrd></ustrd>	140x	О	Unstructured	
-	Set of elements	О	Structured	Sub-element structure must be aligned with pacs.008.001.08.
┬ <ultmtdbtr></ultmtdbtr>	Set of elements	0	Ultimate debtor	
- <pty></pty>	Set of elements	M	Party	
- <nm></nm>	70x	О	Name	
- <id></id>	Set of elements	M	Ultimate debtor identification	
├ <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.

- <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with
	Set of Cicinoms	Orj	Tutturur person ruentmeution	pacs.008.001.08.
T <dbtr></dbtr>	Set of elements	О	Debtor	_
- <pty></pty>	Set of elements	M	Party	
- <nm></nm>	70x	M	Debtor name	
- <pstladr></pstladr>	Set of elements	0	Address	Sub-element structure must be aligned with
				pacs.008.001.08.
├ <id></id>	Set of elements	О	Debtor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with
				pacs.008.001.08.
T <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with
				pacs.008.001.08.
<pre></pre>	Set of elements	M	Debtor account	
<b>└</b>	Set of elements	M	Debtor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
T <prxy></prxy>	Set of elements	О	Proxy	Sub-element structure must be aligned with
				pacs.008.001.08.
┬ <dbtragt></dbtragt>	Set of elements	M	Debtor agent	
<pre>FinInstnId&gt;</pre>	Set of elements	M	Financial institution identification	
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
<pre>CdtrAgt&gt;</pre>	Set of elements	M	Creditor agent	
FinInstnId>	Set of elements	M	Financial institution identification	
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
├─ <cdtr></cdtr>	Set of elements	O	Creditor	
│	Set of elements	M	Party	
— <nm></nm>	70x	M	Creditor name	
	Set of elements	О	Address	Sub-element structure must be aligned with pacs.008.001.08.
└┬ <id></id>	Set of elements	О	Creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	
		•	_	
T <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
<cdtracct></cdtracct>	Set of elements	M	Creditor Account	Sub-element structure must be aligned with pacs.008.001.08.
L <sub>T</sub> <id></id>	Set of elements	M	Creditor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
	Set of elements	О	Proxy	Sub-element structure must be aligned with pacs.008.001.08.

┬ <ultmtcdtr></ultmtcdtr>	Set of elements	О	Ultimate creditor	
<pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	О	Name	
\ \ \ \ <id></id>	Set of elements	О	Ultimate creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
<pre></pre>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
T <purp></purp>	Set of elements	О	Payment purpose	
└ <cd></cd>	Code	M	Payment purpose ISO code	

## 8.3. Instant payment status message (pacs.002.001.10)

The instant payment status message is used to inform the Participant about the message status.

The table below provides a compilation of the use of major instant payment status message elements in various situations.

	uoie eeiow provia	_				1	_			
No.	Description	Instructing	Bulk	Bulk status	Bulk status	Message	Message	Message status	Original	Instructed
		agent	status	reason code	originator	status	status reason	reason originator	message type	agent
		GrpHdr/	OrgnlGrp	OrgnlGrpInfA	OrgnlGrpInfA	TxInfAndSts/	TxInfAndSts/	TxInfAndSts/Sts	OrgnlGrpInf	
		InstgAgt/	InfAndSts	ndSts/StsRsnI	ndSts/StsRsnI	TxSts	StsRsnInf/	RsnInf/Orgtr/Id/	AndSts/Orgn	
		FinInstn	/GrpSts	nf/Rsn/Cd	nf/Orgtr/Nm		Rsn/Cd	OrgIdBICorBEI	lMsgNmId	
		Id/BIC	_		-				-	
1.	Confirmation by the	Participant	ACCP	_	_	_	_	_	pacs.008	The BIC
	participant that the	BIC								of
	incoming instant									Latvijas
	payment can be									Banka
	credited									
2.	Rejection by the	Participant	_	_	_	RJCT	Message	Creditor agent	pacs.008	The BIC
	participant; instant	BIC					status reason	BIC		of
	payment cannot be						code of the			Latvijas
	credited						creditor agent			Banka
3.	Confirmation to the	The BIC of	ACCP	_	_	_	_	_	pacs.008	Participan
	participant on	Latvijas Banka								t BIC
	outgoing instant									
	payment execution									
4.	Information to the	The BIC of	_	_	_	RJCT	Message	BIC of the	pacs.008	Participan
	participant that the	Latvijas Banka					status reason	message status		t BIC
	instant payment has						of the creditor	originator		
	not been executed						agent			
5.	Information to the	The BIC of	_	_	_	RJCT	TM01	The BIC of	pacs.008	Participan
	participant on	Latvijas Banka						Latvijas Banka or		t BIC
	incoming instant							TIPS		
	payment rejection									
	due to time-out									
6.	Information to the	The BIC of	_	_	_	RJCT	AB06	The BIC of	pacs.008	Debtor
	participant on	Latvijas Banka						Latvijas Banka or	_	agent BIC
		Ĭ						TIPS		
	due to time-out									
7.	Information to the	The BIC of	RJCT	FF01	NOTAVAIL	Not used	Not used	Not used	pacs.008	Debtor
									1	agent BIC
	payment rejection due to time-out Information to the participant on outgoing instant payment rejection due to time-out	Latvijas Banka	- RJCT	- FF01	NOTAVAIL ABLE			The BIC of Latvijas Banka or TIPS		age

	message rejection due to inappropriate formats								pacs.028	
8.	Information to the participant on message rejection due to inappropriate formats	The BIC of Latvijas Banka	RJCT	FF01	NOTAVAIL ABLE	Not used	Not used	Not used	pacs.002 pacs.004 camt.029	Creditor agent BIC
9.	Information to the participant on message rejection during validation	The BIC of Latvijas Banka	_	_	_	RJCT	Instant payment service error code	The BIC of Latvijas Banka	pacs.008 camt.056 pacs.028	Debtor agent BIC
10.	Message on message rejection during validation	The BIC of Latvijas Banka	_	_	_	RJCT	Instant payment service's error code	The BIC of Latvijas Banka	pacs.002 pacs.004 camt.029	Creditor agent BIC

An instant payment status message has the following root elements:

Element	Format or data type	Sta-	Description	Notes
		tus		
└┬ <document></document>	Set of elements			
<pre></pre>	Set of elements	M		
⊤ <grphdr></grphdr>	Set of elements	M	Instant payment status message bulk	One occurrence of the element is allowed.
			information	
→ <orgnlgrpinfandsts></orgnlgrpinfandsts>	Set of elements	M	Bulk information of the original instant	One occurrence of the element is allowed.
			payment	
T <txinfandsts></txinfandsts>	Set of elements	О	Status message information	One occurrence of the element is allowed.

An instant payment status message shall be generated in accordance with ISO 20022 pacs.002.001.10 message.

Element	Format or data	Sta-	Description	Notes
	type	tus		
<pre><grphdr></grphdr></pre>	Set of elements		Instant payment status message bulk information	One occurrence of the element is allowed.
├─ <msgid></msgid>	35x		Instant payment status message bulk identifier	Must be used as specified in Paragraph 4.2 herein.

- <credttm></credttm>	ISODateTime	M	Date and time at which the message was created	
<pre></pre>	Set of elements	M	Instructing agent	The participant BIC shall be indicated in the messages to be sent to the instant payment service. The BIC of Latvijas Banka is indicated in the messages received from the instant payment service.
- <fininstnid></fininstnid>	Set of elements	M		
- <bicfi></bicfi>	4!c2!a2!c	M	BIC of the Instructing Agent	
<pre><instdagt></instdagt></pre>	Set of elements	M	Instructed agent	The BIC of Latvijas Banka shall be indicated in the messages to be sent to the instant payment service. The participant BIC is indicated in the messages received from the instant payment service.
T <fininstnid></fininstnid>	Set of elements	M		
- <bicfi></bicfi>	4!c2!a2!c	M	BIC of the Instructed Agent	
<pre></pre>	Set of elements	M		One occurrence of the element is allowed.
- <orgnlmsgid></orgnlmsgid>	35x	M		Must be used as specified in Paragraph 4.2 herein.
<orgnlmsgnmid></orgnlmsgnmid>	Code	M	Type of messages in the original bulk	Code "pacs.008.001.08" shall be indicated in the messages to be sent to the instant payment service. Codes "pacs.008.001.08", "pacs.004.001.09", "pacs.002.001.10", "pacs.028.001.03", "camt.056.001.08" and "camt.029.001.09" are allowed in the messages received from the instant payment service. When forwarding a message received, EKS IP service does not check the correspondence of this value with respect to the version of the original message.
- <grpsts></grpsts>	Code	С	Bulk status	Code "ACCP" is allowed in the messages to be sent to the instant payment service. Codes "ACCP" or "RJCT" can be indicated in the messages received from the instant payment service. Cannot be used at the same time as <txinfandsts>/<txsts>.</txsts></txinfandsts>
「一 <stsrsninf></stsrsninf>	Set of elements	С	Status reason information	
- <orgtr></orgtr>	Set of elements	С	Status originator	Not allowed where <grpsts> is "ACCP". Mandatory where <grpsts> is "RJCT".</grpsts></grpsts>
<nm></nm>	70x	С	Name	According to SCT Inst Inter-PSP IG, shall be used where the status information originator is a payment system without the BIC.
	Set of elements	С		

├ <orgid></orgid>	Set of elements	M		
- <anybic></anybic>	4!c2!c2!a[3!c]	M	Status originator BIC	
<rsn></rsn>	Set of elements	С	Reason for the bulk status	Not allowed where <grpsts> is "ACCP". Mandatory where <grpsts> is "RJCT".</grpsts></grpsts>
— <cd></cd>	Code	{Or	Reason for the status (ISO20022 error code)	According to SCT Inst Inter-PSP IG, only code "FF01" (erroneous message) is allowed.
└ <prtry></prtry>	Code	Or}	Reason for the status (instant payment service error code).	Only code "TECH" (technical problems) is allowed.
<pre><txinfandsts></txinfandsts></pre>	Set of elements	M		One occurrence of the element is allowed.
- <stsid></stsid>	35x	M	Instant payment status message identifier	Must be used as specified in Paragraph 4.2 herein.
- <orgnlinstrid></orgnlinstrid>	35x	О	Original instruction identification	Must be used as specified in Paragraph 4.2 herein.
- <orgnlendtoendid></orgnlendtoendid>	35x	M	Original identification assigned by the debtor	Must be used as specified in Paragraph 4.2 herein.
— <orgnltxid></orgnltxid>	35x	M	Original message identification	Identifier origin specific for each message type (pacs.008 – <txid>, pacs.004 – <rtrid>,camt.056 – <cxiid>, camt.029 – <cxistsid>, pacs.028 – <stsreqid>). Must be used as specified in Paragraph 4.2 herein.</stsreqid></cxistsid></cxiid></rtrid></txid>
- <txsts></txsts>	Code	С	Message status	Only code "RJCT" is allowed. cannot be used at the same time as <orgnlgrpinfandsts>/<grpsts>.</grpsts></orgnlgrpinfandsts>
- <stsrsninf></stsrsninf>	Set of elements	С	Status reason information	
<pre> <orgtr></orgtr></pre>	Set of elements	C	Status originator	Mandatory where <txsts> is "RJCT".</txsts>
<nm></nm>	70x	С	Status originator name	According to SCT Inst Inter-PSP IG, shall be used where the status information originator is a payment system without the BIC.
<id></id>	Set of elements	С	Identification	
T <orgid></orgid>	Set of elements	С	Organisation identification	
- <anybic></anybic>	4!c2!c2!a[3!c]	С	Status originator BIC	

Н	- <rsn></rsn>	Set of elements	С	Reason for the status	Mondotom: whom (The Chank is "DICT"
H	— <cd></cd>			Treason for the status	Mandatory where <txsts> is "RJCT".</txsts>
	- Ca>	Code	{Or	Reason for the status (ISO20022 error code)	Only listed ISO codes are allowed (Table 14). Cannot be used at the same time as <prtry>.</prtry>
	└ <prtry></prtry>	Code	Or}	Reason for the status (clearing service error code)	Used only in messages received from the instant payment service. Only listed codes are used (Table 15). Cannot be used at the same time as <cd>. Where the message is an instant payment rejection message with code "XT13" or "XT33", the element is compiled as follows: [Code] [space] [erroneous tag].</cd>
	- <accptncdttm></accptncdttm>	ISODateTime	M	Timestamp of original instant payment message acceptance	
	T <orgnltxref></orgnltxref>	Set of elements	M	Information on the original message	
	<pre> <pmttpinf></pmttpinf></pre>	Set of elements	M	Original payment type information	
	T <svclvl></svclvl>	Set of elements	M	Service level	
	- <cd></cd>	Code	M	Code	Only code "SEPA" is allowed.
	<pre><lclinstrm></lclinstrm></pre>	Set of elements	M	User community specific instrument information	
		Code	M	Code	Only code "INST" is allowed.
	T <ctgypurp></ctgypurp>	Set of elements	О	Category purpose	
	- <cd></cd>	Code	{Or	Category purpose ISO code	Only ISO 20022 codes are allowed (Table 5). Cannot be used at the same time as <prtry>.</prtry>
	└ <prtry></prtry>	35x	Or}	Category purpose code	Cannot be used at the same time as <cd>.</cd>
	T <dbtragt></dbtragt>	Set of elements	M	Debtor agent	Debtor agent of the original instant payment.
	T <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	
	└ <bicfi></bicfi>	4!c2!c2!a[3!c]	M	BIC	

## 8.4. Instant payment cancellation request message (camt.056.001.08)

An instant payment cancellation request message shall be generated in accordance with ISO 20022 camt.056.001.08 message. An instant payment cancellation request message is sent to the instant payment service participant to inform it about the request to return a previously settled instant payment the details of which are indicated in the message. According to the SEPA Instant Credit Transfer Scheme Rulebook, an instant payment cancellation request message may be submitted to the instant payment service within ten business days following the settlement day of an instant credit transfer (except when instant payment cancellation request is initiated due to fraudulently initiated instant payment, in which case an instant payment cancellation request message may be submitted to the instant payment service within 13 months following the settlement day) where it is initiated by the debtor agent and within 13 months where it is initiated by the debtor. A response to the received instant payment cancellation request, according to the rules stipulated in the SEPA Instant Credit Transfer Scheme Rulebook, shall be sent no later than within fifteen business days, by sending an instant payment return message or a negative response to the instant payment cancellation request message. The instant payment service does not check whether submission deadline is met.

### Structure of the message

Element	Format or data	Status	Description	Notes
	type			
<pre>CLBFastPmtCxlReq&gt;</pre>	Set of elements			
<pre>- <fitofipmtcxlreq></fitofipmtcxlreq></pre>	Set of elements	M		
Assgnmt>	Set of elements	M	Bulk header	One occurrence of the element is allowed.
├┬ <ctrldata></ctrldata>	Set of elements	M	Control data	One occurrence of the element is allowed.
T <undrlyg></undrlyg>	Set of elements	M	Instant payment cancellation	One occurrence of the element is allowed.
			request message information	
└┬ <signature></signature>	Set of elements	M	Signature	One occurrence of the element is allowed.

#### Bulk header

Element	Format or data	Stat	Description	Notes
	type	us		
- <assgnmt></assgnmt>	Set of elements	M	Bulk header	One occurrence of the element is allowed.
— <id></id>	35x	M	Instant payment cancellation request	Must be used as specified in Paragraph 4.2 herein.
			message bulk identifier	

- <assgnr></assgnr>	Set of elements	M	Instructing agent of an instant payment cancellation request message	The participant BIC shall be indicated in the <bicfi> element of the messages to be sent to the instant payment service. The BIC of an entity assigning the case shall be indicated in the in the <bicfi> element of the messages received from the instant payment service.</bicfi></bicfi>
│ <mark>├</mark> ┬ <pty></pty>	Set of elements	{Or	Party	
- <nm></nm>	70x	{Or	Name	
<del> </del>	Set of elements	Or}	Identification	
LT <orgid></orgid>	Set of elements	O	Organisation identification	
- <anybic></anybic>	4!c2!a2!c[3!c]	{Or	BIC	
L <lei></lei>	18!c2!n	Or}	LEI code	
│ <mark>└</mark> ┬ <agt></agt>	Set of elements	Or}	Agent	
├ <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	
└─ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
Assgne>	Set of elements	M	Instant payment cancellation request message recipient	The BIC of Latvijas Banka shall be indicated in the messages to be sent to the instant payment service in the <bicfi> element. The participant BIC is indicated in the messages received from the instant payment service in the <bicfi> element.</bicfi></bicfi>
│ <mark>├</mark> ┬ <pty></pty>	Set of elements	{Or	Party	
- <nm></nm>	70x	{Or	Name	
<del>                                  </del>	Set of elements	Or}	Identification	
│	Set of elements	O	Organisation identification	
- <anybic></anybic>	4!c2!a2!c[3!c]	{Or	BIC	
L <lei></lei>	18!c2!n	Or}	LEI code	
├ <mark>├</mark> <agt></agt>	Set of elements	Or}	Agent	
- CFinInstnId>	Set of elements	M	Financial institution identification	
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
└ <credttm></credttm>	ISODateTime	M	Date and time of bulk creation	

# Control data

Element	Format or data	Stat	Description	Notes
	type	us		
- <ctrldata></ctrldata>	Set of elements	0	Control data	One occurrence of the element is allowed.
- <nboftxs></nboftxs>	15n	О	Total number of instant payment	Only "1" is allowed.
			cancellations	

# Instant payment cancellation request message information

Element	Format or data	Stat	Description	Notes
	type	us		
└── <undrlyg></undrlyg>	Set of elements	M	Copy message to be requested for cancellation	One occurrence of the element is allowed.
└── <txinf></txinf>	Set of elements	M	Message information	One occurrence of the element is allowed.
- <cxlid></cxlid>	35x	M	Instant payment cancellation request message identifier	Must be used as specified in Paragraph 4.2 herein.
<pre>- &lt;0rgnlGrpInf&gt;</pre>	Set of elements	M	Information on the original bulk	
- <orgnlmsgid></orgnlmsgid>	35x	M	Message identifier of the original bulk	Must be used as specified in Paragraph 4.2 herein.
└ <orgnlmsgnmid></orgnlmsgnmid>	Code	M	Type of messages in the original bulk	Only code "pacs.008.001.08" is allowed. If original pacs.008 was sent before migration to ISO 20022 2019 version, code "pacs.008.001.02" can be used. EKS IP service does not check the correspondence of this value with respect to the version of the original message.
- <orgnlinstrid></orgnlinstrid>	35x	О	Original instruction identification	Must be used as specified in Paragraph 4.2 herein.
- <orgnlendtoendid></orgnlendtoendid>	35x	M	Original identification assigned by the debtor	Must be used as specified in Paragraph 4.2 herein.
- <orgnltxid></orgnltxid>	35x	M	Original message identification	Must be used as specified in Paragraph 4.2 herein.
<pre>- <orgnlintrbk< td=""><td>18d EUR</td><td>M</td><td>Amount of the original message</td><td></td></orgnlintrbk<></pre>	18d EUR	M	Amount of the original message	
<pre>- <orgnlintrbk< td=""><td>ISODate</td><td>M</td><td>Value date of the original message</td><td></td></orgnlintrbk<></pre>	ISODate	M	Value date of the original message	
<pre><cxlrsninf></cxlrsninf></pre>	Set of elements	M	Cancellation request reason information	One occurrence of the element is allowed.
<pre><orgtr></orgtr></pre>	Set of elements	M	Party originating the request for cancellation	
<nm></nm>	70x	О	Name of the party originating the request for cancellation originator where its is a debtor	According to SCT Inst Inter-PSP IG, must be indicated if <cd> contains value "CUST", "AM09" or "AC03".</cd>
	Set of elements	О	Party originating the request for cancellation where it is a debtor agent	
T <orgid></orgid>	Set of elements	M	Organisation identification	
<anybic></anybic>	4!c2!a2!c[3!c]	M	The BIC of the party originating the request for cancellation	

<rsn></rsn>	Set of elements	M	Cancellation request reason information	
- <cd></cd>	Code	{Or	Cancellation reason ISO code	Only listed codes are allowed (Table 12). Cannot be used at the same time as <prtry>. According to SCT Inst Inter-PSP IG, code:  1) "CUST", "AC03" vai "AM09" is allowed where cancellation is initiated by the debtor;  2) code "DUPL", "TECH" or "FRAD" is allowed where cancellation is initiated by the debtor agent.</prtry>
└─ <prtry></prtry>	Code	Or}	Cancellation reason proprietary code	According to SCT Inst Inter-PSP IG, this element can be used only by AOS (Additional Optional Services) participants. Since EKS participants do not use AOS, incoming message containing this element may be rejected.
└ <addtlinf></addtlinf>	105x	О	Additional Information	One occurrence of the element is allowed. According to SCT Inst Inter-PSP IG, only allowed when <cd> contains value "CUST", "AC03", "AM09" or "FRAD".</cd>
<pre>- <orgnltxref></orgnltxref></pre>	Set of elements	M	Information on the original message	According to SCT Inst Inter-PSP IG, sub-elements should contain an exact copy of elements of the received pacs.008. Sub-elements are validated only against xml schema.
- <intrbksttlmdt></intrbksttlmdt>	ISODate	О	Value date	
→ <sttlminf></sttlminf>	Set of elements	О	Settlement Information	Sub-element structure must be aligned with pacs.008.001.08.
- <sttlmmtd></sttlmmtd>	Code	О	Settlement method	
<pre>SttlmAcct&gt;</pre>	Set of elements	О	Settlement Account	Sub-element structure must be aligned with pacs.008.001.08.
ClrSys>	Set of elements	О	Clearing system	Sub-element structure must be aligned with pacs.008.001.08.
<pre><pmttpinf></pmttpinf></pre>	Set of elements	О	User community specific instrument information	
<pre>SvcLvl&gt;</pre>	Set of elements	О	Service Level	Sub-element structure must be aligned with pacs.008.001.08.
- <lclinstrm></lclinstrm>	Set of elements	О	User community specific instrument information	Sub-element structure must be aligned with pacs.008.001.08.
T <ctgypurp></ctgypurp>	Code	0	Category purpose	Sub-element structure must be aligned with pacs.008.001.08.
• • • •				
T <rmtinf></rmtinf>	Set of elements	О	Remittance information	

├ <strd></strd>	Set of elements	О	Structured	
┬ <ultmtdbtr></ultmtdbtr>	Set of elements	0	Ultimate debtor	
ー 〈Pty〉	Set of elements	M	Party	
— <nm></nm>	70x	0	Name	
├ <b>├</b> <id></id>	Set of elements	M	Ultimate debtor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
T <prvtid></prvtid>	Set of elements	Or}	Fiziskās personas identifikācija	Sub-element structure must be aligned with pacs.008.001.08.
- <dbtr></dbtr>	Set of elements	0	Debtor	
- <pty></pty>	Set of elements	M	Party	
- <nm></nm>	70x	M	Debtor name	
T <pstladr></pstladr>	Set of elements	O	Address	Sub-element structure must be aligned with pacs.008.001.08.
- <id></id>	Set of elements	О	Debtor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
T <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
T <dbtracct></dbtracct>	Set of elements	M	Debtor account	
- <id></id>	Set of elements	M	Debtor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
	Set of elements	0	Proxy	Sub-element structure must be aligned with pacs.008.001.08.
T <dbtragt></dbtragt>	Set of elements	M	Debtor agent	The specified BIC shall be available in the routing table.
- <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	The specific Bite shall be a managed in the rowing motor
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
- <cdtragt></cdtragt>	Set of elements	M	Creditor agent	The specified BIC shall be available in the routing table.
- <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	The specified Die shall be available in the fouring thole.
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
- Cdtr>	Set of elements	O	Creditor	
Tr <pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	M	Creditor name	
T <pstladr></pstladr>	Set of elements	O	Address	Sub-element structure must be aligned with pacs.008.001.08.
	Set of elements	О	Creditor identification	
T <orgid></orgid>	Set of elements Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.

- <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
		Or}	_	
T <cdtracct></cdtracct>	Set of elements	M	Creditor account	
<id></id>	Set of elements	M	Creditor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
T <prxy></prxy>	Set of elements	О	Proxy	Sub-element structure must be aligned with pacs.008.001.08.
→ <ultmtcdtr></ultmtcdtr>	Set of elements	O	Ultimate creditor	
<pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	О	Name	
	Set of elements	О	Ultimate creditor identification	
┬ <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
			-	
T <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
		Or}		
- <purp></purp>	Set of elements	O	Payment purpose	
L <cd></cd>	Code	M	Payment purpose ISO code	

## 8.5. Instant payment resolution of investigation message (camt.029.001.09)

An instant payment resolution of investigation message shall be generated in accordance with ISO 20022 camt.029.001.09 message. An instant payment resolution of investigation message is sent to inform an instant payment service participant that the requested return of the instant payment is not possible.

## Structure of the message

Element	Format or data	Sta-	Description	Notes
	type	tus		
<pre>L <lbfastrsltnofinvstgtn></lbfastrsltnofinvstgtn></pre>	Set of elements			
→ <rsltnofinvstgtn></rsltnofinvstgtn>	Set of elements	M		
T <assgnmt></assgnmt>	Set of elements	M	Instant payment resolution of investigation message bulk information	One occurrence of the element is allowed.
T <sts></sts>	Set of elements	M	Status data	One occurrence of the element is allowed.
CxlDtls>	Set of elements	M	Instant payment resolution of investigation message information	One occurrence of the element is allowed.
├ <signature></signature>	Set of elements	M	Signature	One occurrence of the element is allowed.

## Bulk header

Element	Format or data	Sta-	Description	Notes
	type	tus		
└┬ <assgnmt></assgnmt>	Set of elements	M		One occurrence of the element is allowed.
- <id></id>	35x	M	Instant payment resolution of investigation bulk identifier	Must be used as specified in Paragraph 4.2 herein.
- <assgnr></assgnr>	Set of elements	M	Instructing agent of instant payment resolution of investigation message bulk	The participant BIC shall be indicated in the <bicfi> element of the messages to be sent to the instant payment service. An entity sending the resolution of investigation is indicated in the messages received from the instant payment service.</bicfi>
T <pty></pty>	Set of elements	{Or	Party	
- <nm></nm>	70x	{Or	Name	
	Set of elements	Or}	Identification	

├ <orgid></orgid>	Set of elements	0	Organisation identification	
- <anybic></anybic>	4!c2!a2!c[3!c]	{Or	BIC	
L <lei></lei>	18!c2!n	Or}	LEI code	
T <agt></agt>	Set of elements	Or}		
├ <fininstnid></fininstnid>	Set of elements	M		
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
- <assgne></assgne>	Set of elements	M	Instructed agent of an nstant payment resolution of investigation message bulk	The BIC of Latvijas Banka shall be indicated in the <bicfi> element of the messages to be sent to the instant payment service. The participant BIC is indicated in the <bicfi> element of the messages received from the instant payment service.</bicfi></bicfi>
T <pty></pty>	Set of elements	О	Party	
- <nm></nm>	70x	{Or	Name	
	Set of elements	Or}	Identification	
├ <orgid></orgid>	Set of elements	0	Organisation identification	
- <anybic></anybic>	4!c2!a2!c[3!c]	{Or	BIC	
☐ <lei></lei>	18!c2!n	Or}	LEI code	
└┰ <agt></agt>	Set of elements	Or}		
├ <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
└ <credttm></credttm>	ISODateTime	M	Date and time of bulk creation	

## Status data

Element	Format or data	Sta-	Description	Notes
	type	tus		
- <sts></sts>	Set of elements	M		One occurrence of the element is allowed.
L <conf></conf>	Code	M	Resolution of investigation status	Only code "RJCR" is allowed.
			code	

# Instant payment resolution of investigation message information

Eler	ment	Format or data	Sta-	Description	Notes
		type	tus		
$\Box$	<cxldtls></cxldtls>	Set of elements	M	Instant payment resolution of	
				investigation message information	
	- <txinfandsts></txinfandsts>	Set of elements	M	Message information	

- <cxlstsid></cxlstsid>	35x	M	Instant payment resolution of investigation message identifier	Must be used as specified in Paragraph 4.2 herein.
T <orgnlgrpinf></orgnlgrpinf>	Set of elements	M	Information on the original bulk	
- <orgnlmsgid></orgnlmsgid>	35x	M	Message identifier of the original bulk	Must be used as specified in Paragraph 4.2 herein.
└ <orgnlmsgnmid></orgnlmsgnmid>	Code	M	Type of messages in the original bulk	Only code "pacs.008.001.08" is allowed. If original pacs.008 was sent before migration to ISO 20022 2019 version, code "pacs.008.001.02" can be used. EKS IP service does not check the correspondence of this value with respect to the version of the original message.
- <orgnlinstrid></orgnlinstrid>	35x	О	Original instruction identification	Must be used as specified in Paragraph 4.2 herein.
- <orgnlendtoendid></orgnlendtoendid>	35x	M	Original identification assigned by the debtor	Must be used as specified in Paragraph 4.2 herein.
— <orgnltxid></orgnltxid>	35x	M	Original message identification	Must be used as specified in Paragraph 4.2 herein.
- <txcxlsts></txcxlsts>	Code	M	Message cancellation status	Only code "RJCR" is allowed.
<pre></pre> <pre><cxlstsrsninf></cxlstsrsninf></pre>	Set of elements	M	resolution of investigation reason information	
<pre> &lt;0rgtr&gt;</pre>	Set of elements	M	resolution of investigation request originator	
— <nm></nm>	70x	О	Where the originator is a debtor, the name of the debtor originating the resolution of investigation request	According to SCT Inst Inter-PSP IG, cannot be used at the same time as <id>.</id>
- Id>	Set of elements	О		According to SCT Inst Inter-PSP IG, cannot be used at the same time as <nm>.</nm>
T <orgid></orgid>	Set of elements	M		
- <anybic></anybic>	4!c2!a2!c[3!c]	M	BIC of the resolution of investigation request originator	
T <rsn></rsn>	Set of elements	M	Cancellation reason information	
- <cd></cd>	Code	{Or	Cancellation reason code	Only ISO 20022 codes are allowed (Table 13). Cannot be used at the same time as <prtry>.</prtry>
Prtry>	Code	Or}		Cannot be used at the same time as <cd>. According to SCT Inst Inter-PSP IG, this element can be used only by AOS (Additional Optional Services) participants. Since EKS participants do not use AOS, incoming message containing this element may be rejected.</cd>

	- <addtlinf></addtlinf>	105x	M	Additional information	Multiple occurrences of the element are allowed when the following conditions are met:  1. If used as a negative response to an instant payment cancellation request initiated by the debtor agent, first occurrence is mandatory and must start with the code "ATR053/", followed by the instant payment cancellation request message identifier (field <cxiid>) indicated in camt.056. Additionally:  1.1. when "LEGL" is indicated in field <rsn><cd>, two further occurrences are allowed to specify the reason of the negative response. Both occurrences shall start with the code "ATR057/";  1.2. When reason code was "FRAD" in the camt.056, then up to ten further optional occurrences are allowed, all starting with the code "FRAD/" followed by all information available to file a legal claim to recover the funds.  2. If used as a negative response to an instant payment cancellation request initiated by the debtor, first occurrence is mandatory and must start with the code "ATR072/", followed by the instant payment cancellation request message identifier (field <cxiid>) indicated in camt.056. Additionally, when reason code was "AC03" in the camt.056, up to ten further optional occurrences are allowed, all starting with the code "ATR078" followed by all information available to file a legal claim to recover the funds transferred to a wrong account number.</cxiid></cd></rsn></cxiid>
	T <orgnltxref></orgnltxref>	Set of elements	M	Information on the original message	According to SCT Inst Inter-PSP IG, sub-elements should contain an exact copy of elements of the received pacs.008. Sub-elements are validated only against xml schema.
	- <intrbksttlmdt></intrbksttlmdt>	ISODate	О	Amount of the original message	
	T <sttlminf></sttlminf>	Set of elements	0	Value date of the original message	Sub-element structure must be aligned with pacs.008.001.08.
-	- <sttlmmtd></sttlmmtd>	Code	0		
	- <sttlmacct></sttlmacct>	Set of elements	0	Settlement method	Sub-element structure must be aligned with pacs.008.001.08.

一 <clrsys></clrsys>	Set of elements	О		Sub-element structure must be aligned with pacs.008.001.08
┬ <pmttpinf></pmttpinf>	Set of elements	О		
- <svclvl></svclvl>	Set of elements	О		Sub-element structure must be aligned with pacs.008.001.08.
- <lclinstrm></lclinstrm>	Set of elements	О	User community specific	Sub-element structure must be aligned with pacs.008.001.08
<u> </u>			instrument information	
T <ctgypurp></ctgypurp>	Code	О	Category purpose	Sub-element structure must be aligned with pacs.008.001.08
┬ <rmtinf></rmtinf>	Set of elements	О	Remittance information	
- <ustrd></ustrd>	140x	О	Unstructured	
├ <strd></strd>	Set of elements	О	Structured	Sub-element structure must be aligned with pacs.008.001.08.
• • • •				
T <ultmtdbtr></ultmtdbtr>	Set of elements	О	Ultimate debtor	
│ <b>└</b> ┬ <pty></pty>	Set of elements	M	Party	
- <nm></nm>	70x	О	Name	
├ <id></id>	Set of elements	M	Ultimate debtor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08
····				
├ <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08
		Or}		
T <dbtr></dbtr>	Set of elements	О	Debtor	
ー 〈Pty〉	Set of elements	M	Party	
— <nm></nm>	70x	M	Debtor name	
T <pstladr></pstladr>	Set of elements	O	Address	Sub-element structure must be aligned with pacs.008.001.08
••••				
	Set of elements	О	Debtor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08
T <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08
		Or}		
T <dbtracct></dbtracct>	Set of elements	M	Debtor account	
└── <id></id>	Set of elements	M	Debtor account identification	
- <iban></iban>	2!a2!n30x	M	IBAN	
T <prxy></prxy>	Set of elements	0	Proxy	Sub-element structure must be aligned with pacs.008.001.08
T <dbtragt></dbtragt>	Set of elements	M	Debtor agent	
- <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	

┬ <cdtragt></cdtragt>	Set of elements	M	Creditor agent	
┬ <fininstnid></fininstnid>	Set of elements	M	Financial Institution identification	
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
T <cdtr></cdtr>	Set of elements	О	Creditor	
T <pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	M	Creditor name	
T <pstladr></pstladr>	Set of elements	О	Address	Sub-element structure must be aligned with pacs.008.001.08.
		<u> </u>		
<u> </u>	Set of elements	О	Creditor identification	
├┬ <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
· · · · ·	0 . 6 1	1	N. 1 '1 'C' '	0.1 1 1 1 1 1 1 000 001 00
├ <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
- <cdtracct></cdtracct>	Set of elements	M	Creditor account	
- <id>- <id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id></id>	Set of elements	M	Creditor account identification	
- <iban></iban>				
	2!a2!n30x	M	IBAN	
├ ├ <prxy></prxy>	Set of elements	О	Proxy	Sub-element structure must be aligned with pacs.008.001.08.
- <ultmtcdtr></ultmtcdtr>	Set of elements	О	Ultimate creditor	
- <pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	0	Name	
	Set of elements	0	Ultimate creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
├ <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
• • • •				
一 <purp></purp>	Set of elements	О	Payment purpose	
└ <cd></cd>	Code	M	Payment purpose code	

#### 8.7. Instant payment status request message (pacs.028.001.03)

An instant payment status request message shall be generated in accordance with ISO 20022 pacs.028.001.03 message. An instant payment status request message shall be sent by a participant where an instant payment status message about an instant payment message sent to the instant payment service has not been received in due time or where an instant payment status message confirming the possibility to credit the account of the creditor in response to the received instant payment message has been sent but an instant payment status message confirming the credit to IP liquidity position has not been received. An instant payment status request message may be sent also to inquire about the status of a previously sent instant payment cancellation request message, where no reply to the instant payment cancellation request message initiated by the debtor has been received within 15 days.

### Structure of the message

Element	Format or data	Sta-	Description	Notes
	type	tus		
T <document></document>	Set of elements			
<pre>- <fitofipmtstsreq></fitofipmtstsreq></pre>	Set of elements	M		
⊤ <grphdr> ····</grphdr>	Set of elements	M	Bulk information	One occurrence of the element is allowed.
T <orgnlgrpinf></orgnlgrpinf>	Set of elements	M	Information on the original bulk	One occurrence of the element is allowed.
TxInf>	Set of elements	M	Message information	One occurrence of the element is allowed.

#### Bulk header

Element	Format or data	Sta	Description	Notes
	type	-		
		tus		
└ <grphdr></grphdr>	<pre> <grphdr> Set of elements</grphdr></pre>		Instant payment status request message bulk information	One occurrence of the element is allowed.
- <msgid></msgid>	35x	M	Bulk identifier	Must be used as specified in Paragraph 4.2
- <credttm></credttm>	ISODateTime	M Date and time of bulk creation		
<pre></pre>	Set of elements			The participant BIC shall be indicated in the messages to be sent to the instant payment service. The messages received

				from the instant payment service shall contain the BIC of the institutions that submitted this message to the instant payment service.
- <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	- <bicfi> 4!c2!a2!c[3!c]</bicfi>		BIC of the Instructing Agent	
<pre><instdagt></instdagt></pre>			Instructed agent	The BIC of Latvijas Banka shall be indicated in the messages to be sent to the instant payment service. Participant BIC shall be indicated in the messages received from the instant payment service.
└ <fininstnid></fininstnid>	Set of elements	M		
└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC of the instructed agent	

# Information on the original bulk

Element	Format or data	Sta-	Description	Notes	
	type	tus			
→ <orgnlgrpinf></orgnlgrpinf>	Set of elements	M	Information on the original bulk	One occurrence of the element is allowed.	
- <orgnlmsgid></orgnlmsgid>	35x	M	Message identifier of the original bulk	Must be used as specified in Paragraph 4.2	
- <orgnlmsgnmid></orgnlmsgnmid>	Code	M	Type of messages in the original bulk	Only codes "pacs.008.001.08" or "camt.056.001.08" are allowed. If original pacs.008 or camt.056 was sent before migration to ISO 20022 2019 version, code "pacs.008.001.02" or "camt.056.001.01" can be used. EKS IP service does not check the correspondence of this value with respect to the version of the original message.	

# Status request message structure

Element	Format or data	Sta-	Description	Notes	
	type	tus			
└ <txinf></txinf>	Set of elements	M		According to SCT Inst Inter-PSP IG, where pacs.028 is being sent to inquire about the status of a previously sent: - instant payment message (pacs.008), one occurrence of the element is allowed; - instant payment cancellation request message (camt.056), up several occurrences of the element are	

				allowed in the messages to be sent to the instant payment service. The messages received from the instant payment service shall contain one occurrence of the element.
- <stsreqid></stsreqid>	35x	M	Message identifier	Must be used as specified in Paragraph 4.2 herein.
- <orgnlinstrid></orgnlinstrid>	35x	С	Original instruction identification	Must be used as specified in Paragraph 4.2 herein. According to SCT Inst Inter-PSP IG, where <pre><orgnlmsgnmid>contains value:     "camt.008.001.08" or "pacs.008.001.02", mandatory if present in the initial instant payment message;     "camt.056.001.081" or "camt.056.001.01", <cxiid> of the respective message must be filled in.</cxiid></orgnlmsgnmid></pre>
- <orgnlendtoendid></orgnlendtoendid>	35x	M	Original identification assigned by the debtor	Must be used as specified in Paragraph 4.2 herein.
- <orgnltxid></orgnltxid>	35x	M	Original message identification	Must be used as specified in Paragraph 4.2 herein.
- <accptncdttm></accptncdttm>	ISODateTIme	О	Timestamp of original instant payment message acceptance	According to SCT Inst Inter-PSP IG, if <orgnlmsgnmid>contains value: - "camt.008.001.08" or "pacs.008.001.02",, mandatory; - "camt.056.001.08" or "camt.056.001.01", timestamp of original instant payment message (pacs.008) acceptance must be filled in.</orgnlmsgnmid>
- <orgnltxref></orgnltxref>	Set of elements	M	Information on the original message	According to SCT Inter-PSP IG, sub-elements should contain an exact copy of elements of the received pacs.008. Sub-elements are validated only against xml schema.
- <intrbksttlmdt></intrbksttlmdt>	ISODate	О	Amount of the original message	, č
T <sttlminf></sttlminf>	Set of elements	О	Date of the original message	Sub-element structure must be aligned with pacs.008.001.08.
- <sttlmmtd></sttlmmtd>	Kods	О		
<pre>SttlmAcct&gt;</pre>	Set of elements	О	Settlement method	Sub-element structure must be aligned with pacs.008.001.08.
一 <clrsys></clrsys>	Set of elements	0		Sub-element structure must be aligned with pacs.008.001.08.

T <pmttpinf></pmttpinf>	Set of elements	О	Payment type information	
- <svclvl></svclvl>	Set of elements	0	Service level	Sub-element structure must be aligned with pacs.008.001.08.
- <lclinstrm></lclinstrm>	Set of elements	О	User community specific instrument	Sub-element structure must be aligned with pacs.008.001.08.
			information	
T <ctgypurp></ctgypurp>	Kods	О	Category purpose	Sub-element structure must be aligned with pacs.008.001.08.
T <rmtinf></rmtinf>	Set of elements	О	Remittance information	
├─ <ustrd></ustrd>	140x	О	Unstructured	
T <strd></strd>	Set of elements	О	Structured	Sub-element structure must be aligned with pacs.008.001.08.
• • • •				
→ <ultmtdbtr></ultmtdbtr>	Set of elements	О	Ultimate debtor	
ー 〈Pty〉	Set of elements	M	Party	
— <nm></nm>	70x	О	Ultimate debtor's name	
└── <id></id>	Set of elements	M	Ultimate debtor identifier	
⊤ <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
••••				
- <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
• • • •		Or}		
T <dbtr></dbtr>	Set of elements	О	Debtor	
├ <mark>├</mark> <pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	M	Debtor name	
T <pstladr></pstladr>	Set of elements	О	Address	Sub-element structure must be aligned with pacs.008.001.08.
├ <id></id>	Set of elements	О	Debtor identification	
├ <orgid></orgid>	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
├ <prvtid></prvtid>	Set of elements		Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
		Or}		
T <dbtracct></dbtracct>	Set of elements	О	Debtor account	
	Set of elements	О	Debtor account identification	
- <iban></iban>	2!a2!n30x	О	IBAN	
T <prxy></prxy>	Set of elements	О	Proxy	Sub-element structure must be aligned with pacs.008.001.08.
· · · · ·				
T <dbtragt></dbtragt>	Set of elements	M	Debtor agent	
T <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	
- <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	
┬ <cdtragt></cdtragt>	Set of elements	M	Creditor agent	
- <fininstnid></fininstnid>	Set of elements	M	Financial institution identification	

└ <bicfi></bicfi>	4!c2!a2!c[3!c]	M	BIC	Mandatory in the messages to be sent to the instant payment service.
├── <cdtr></cdtr>	Set of elements	О	Creditor	
<pre>Pty&gt;</pre>	Set of elements	M	Party	Sub-element structure must be aligned with pacs.008.001.08.
— <nm></nm>	70x	M	Creditor name	
T <pstladr></pstladr>	Set of elements	О	Address	
<id></id>	Set of elements	О	Creditor identification	
T <orgid></orgid>	Set of elements	{Or	Organisation identification	
- <prvtid></prvtid>	Set of elements	Or}	Natural person identification	
T <cdtracct></cdtracct>	Set of elements	О	Creditor account	
	Set of elements	О	Creditor account identification	
- <iban></iban>	2!a2!n30x	О	IBAN	
	Set of elements	О	Proxy	Sub-element structure must be aligned with pacs.008.001.08.
┬ <ultmtcdtr></ultmtcdtr>	Set of elements	О	Ultimate creditor	
<pty></pty>	Set of elements	M	Party	
— <nm></nm>	70x	О	Ultimate creditor's 'ame	
	Set of elements	О	Ultimate creditor identification	
	Set of elements	{Or	Organisation identification	Sub-element structure must be aligned with pacs.008.001.08.
☐ <prvtid></prvtid>	Set of elements	Or}	Natural person identification	Sub-element structure must be aligned with pacs.008.001.08.
- <purp></purp>	Set of elements	0	Payment purpose	
- <cd></cd>	Kods	M	Payment purpose code	

## 8.8. Reply message to an incoming message not compliant with the scheme

Where a message that is not compliant with the message scheme has been received from a participant, a rejection message is sent in reply to this erroneous message informing that the message cannot be processed.

No.	Element	Format or data type	Status	Description
1.	└ <fastcrptmsg></fastcrptmsg>	Set of elements	M	
2.	— <msgid></msgid>	35x	M	Message identifier. Space is not allowed.
3.	- <relmsgid></relmsgid>	35x	M	Identifier of the incoming message which the current message replies to. Space is not allowed.
4.	- <credttm></credttm>	ISODateTime	M	Date and time of message creation.

#### 8.9. Sets of codes allowed to be used

#### 8.9.1. Clearing System codes

Table 4

ISO 20022 ExternalCashClearingSystem1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

### 8.9.2. Payment purpose category ISO codes

Table 5

ISO 20022 ExternalCategoryPurpose1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

### 8.9.3. Organisation identification type codes

Table 6

ISO 20022 ExternalOrganisationIdentification1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

#### 8.9.4. Person identification codes

Table 7

ISO 20022 ExternalPersonIdentification1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

Where a natural person is identified by way of its ID number, the appropriate natural person's identification type code shall be "NIDN".

#### 8.9.5. Payment purpose ISO codes

Table 8

ISO 20022 ExternalPurpose1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

### 8.9.6. Account identification codes

Table 9

ISO 20022 ExternalAccountIdentification1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

#### 8.9.7. Proxy account type codes

Table 10

ISO 20022 ExternalProxyAccountType1Code

Available:

https://www.iso20022.org/external\_code\_list.page "External Code Sets".

# 8.10. Codes used in instant payment service messages

## 8.10.1. Settlement method ISO codes

## Table 11

Nr.p.k.	Code	Paskaidrojumi
1.	CLRG	Settlement is done through a payayments clearing system.
2.	INGA	Settlement is done by the agent instructing and forwarding
		the payayment to the next party in the payments chain.
3.	INDA	Settlement is done by the agent instructed to execute a
		payment instruction.
4.	COVE	Cover payment.

## 8.10.2. Cancellation reason ISO codes

### Table 12

Nr.p.k.	Code	Paskaidrojumi
1.	CUST	Cancellation requested by the Debtor.
2.	DUPL	Payment is a duplicate of another payment.
3.	TECH	Erroneous instant payment due to technical issues.
4.	FRAD	Fraudulent original payment
5.	AC03	Wrong IBAN.
6.	AM09	Wrong amount.

# 8.10.3. ISO codes for resolution of investigation reason

Table 13

No.	Code	Explanation
1.	CUST	Beneficiary's refusal
2.	LEGL	Legal restrictions.
3.	AC04	Account is closed.
4.	AM04	Insufficient funds on the account.
5.	NOAS	No response from beneficiary
6.	NOOR	The original instant payment message has not been received.
7.	ARDT	The message has already been returned.

## 8.10.4. Message status reason ISO codes

Table 14

No.	Code	Explanation	Instant payment service*	Creditor agent*
1.	AB05	Instant payment rejected: the creditor agent failed to reply in due time on a possibility to credit the creditor's account.		X
2.	AB06	Instant payment rejected: the intermediary institution failed to reply in due time on a possibility to credit the creditor's account.	X	X
3.	AB07	The agent is not available online for receiving instant payments. To be used if it is not known which particular agent is not available.	X	X

4.	AB08	Creditor agent is not available online for receiving instant payments.	X	X
5.	AB09	Instant payment rejected: creditor agent discovered an error in the instant payment.		X
6.	AB10	Instant payment rejected: instant payment system discovered an error in the instant payment.		X
7.	AC01	Incorrect account number format or the account number does not exist.		X
8.	AC04	The account is closed.		X
9.	AC06	The account is blocked.		X
10.	AG01	Crediting funds to such an account type is not allowed.		X
11.	AG02	The bank operation code indicated in the message does not correspond to the creditor.		X
12.	AG09	The original message has not been received.		X
13.	AG10	The agent's operation in the payment system has been suspended.	X	X
14.	AG11	The creditor agent's operation in the payment system has been suspended.	X	X
15.	AM02	The instant payment amount exceeds the maximum amount allowed.	X	X
16.	AM05	Duplicate message	X	X
17.	AM23	The instant payment amount exceeds the set limit.	X	X
18.	BE04	The creditor's address is missing.		X
19.	CNOR	The creditor agent is not a participant of the system.		X
20.	DNOR	The debtor agent is not a participant of the system.		X
21.	DT01	A wrong date has been indicated for the instant payment.	X	
22.	MD07	Ultimate creditor has deceased.		X
23.	MS01	Reason not specified		X
24.	MS02	No reason provided by ultimate creditor.		X
25.	MS03	No reason provided by creditor agent.		X
26.	RC01	Wrong BIC		X
27.	RR01	Instant payment contains no debtor account reference or identification.		X
28.	RR02	Debtor name or address missing in the instant payment.		X
29.	RR03	Creditor name or address missing in the instant payment.		X
30.	RR04	Non-compliance with regulatory requirements.		X
31.	TM01	No reply has been received from the creditor agent within the specified time-frame.	X	

<sup>\*</sup> instant payment service and creditor agent are allowed to use only the codes marked with "X" in the respective column.

# 8.10.5. Message status reason codes of the instant payment service

Table 15

No.	Code	Explanation	Instant	Creditor
			payment	agent
			service	
1.	AM01	Amount of the message is zero.	X	
2.	AM04	Insufficient instant payment liquidity to execute the	X	
		instant payment.	Λ	
3	PY01	BIC missing in the routing table.	X	
4.	TECH	Technical problems	X	
5.	XD19	Wrong IBAN format	X	
6.	XT13	Inappropriate XML element	X	
7.	XT33	Incorrect data format	X	
8.	XT73	Incorrect country code	X	
9.	XT75	Incorrect original instant payment status.	X	

10.	XT77	The amount does not correspond to the one indicated in the original message.	X	
11.	XT79	Debtor agent is not allowed to send messages.	X	
12.	XT80	Creditor agent is not allowed to receive messages.	X	
13.	XT81	The element is not allowed.	X	
14.	XT83	The participant is not allowed to use the product.	X	
15.	XT87	Inappropriate message sender.	X	
16.	XT90	Wrong use of the technical BIC	X	
17.	C10	The received message contains an electronic signature that is wrong, incorrect or revoked by the participant.	X	
18.	C11	The sending participant's electronic signature is missing in the received message.	X	
19.	C12	The message has been signed with an expired key.	X	

## 9. Double-entry check

Double-entry check shall be performed by the instant payment service for the following message elements.

No.	Message type	Transaction identification	Sending institution	Date part from the the message field
1.	pacs.008	<txid></txid>	<dbtragt></dbtragt>	<accptncdttm></accptncdttm>
2.	pacs.004	<rtrid></rtrid>	<cdtragt></cdtragt>	<intrbksttlmdt></intrbksttlmdt>
3.	camt.056	<cxlid></cxlid>	<dbtragt></dbtragt>	<credttm></credttm>
4.	camt.029	<cxlstsid></cxlstsid>	<cdtragt></cdtragt>	<credttm></credttm>
5.	pacs.028	<stsreqid></stsreqid>	<dbtragt></dbtragt>	<credttm></credttm>

Where the information of a newly submitted message to be checked is identical to the information of the message that has already been processed, the newly submitted message shall be rejected.

Double-entry check shall not be performed for instant payment status messages (pacs.002). Where the instant payment service receives more than one instant payment status message related to the same instant payment message, payment status shall be updated only based on the first message received, while following messages are forwarded without changing the status of an instant payment.

## 10. Technical maintenance message

If any of the instant payment service participants has notified Latvijas Banka of technical maintenance in relation to its registered BIC, the instant payment service shall send a technical maintenance message to all participants in accordance with ISO 20022 admi.004.001.02 message.

No	Element	Format or data	Sta-	Description
		type	tus	
1	<pre>SysEvtNtfctn&gt;</pre>	Set of elements	M	
2		Set of elements	M	Detailed information about an event.
3	- <evtcd></evtcd>	Code	M	The following codes are used: "INS" – for insertion of a new technical maintenance message; "DEL" – for deleting of a previous inserted technical maintenance message.
4	- <evtparam></evtparam>	35x	M	Event Parameter. Five occurrences are used: 1. unique message identificator; 2. BIC8 or BIC11 of an entity having technical maintenance; 3. Start of technical maintenance in ISODateTime format; 4. End of technical maintenance in ISODateTime format; 5. code "YES".
5	- <evtdesc></evtdesc>	1000x	О	Event description.
6	- <evttm></evttm>	ISODateTime	M	Date and time of message creation in ISODateTime format.

#### 11. Electronically signed messages

The following messages shall be signed electronically by instant payment service participants:

- instant payment messages (pacs.008);
- instant payment cancellation request messages (camt.056);
- instant payment return messages (pacs.004);
- instant payment resolution of investigation messages (camt.029).

For signing messages, participants shall use the licences of the advanced security system for online message exchange issued by Latvijas Banka. To verify the signature, the public part of the certificate shall be included in the signature attributes. An XML document signing scheme, recommended by World Wide Web Consortium (W3C), shall be used for signing. The entire message shall be signed, incorporating the signature in the message content. When verifying the signature, the signature part shall not be included in the message checksum calculation.

#### Message signature contents:

```
<Signature xmlns="http://www.w3.org/2000/09/xmldsig#">
<SignedInfo>
  <CanonicalizationMethod
 Algorithm="http://www.w3.org/TR/2001/REC-xml-c14n-20010315"/>
  <SignatureMethod
 Algorithm=" http://www.w3.org/2001/04/xmldsig-more#ecdsa-sha256"/>
  <Reference URI=">
   <Transforms>
    <Transform
      Algorithm=" http://www.w3.org/2000/09/xmldsig#enveloped-
signature "/>
   </Transforms>
   <DigestMethod Algorithm="
http://www.w3.org/2001/04/xmlenc#sha256"/>
   <DigestValue></DigestValue>
  </Reference>
</SignedInfo>
<SignatureValue></SignatureValue>
<KeyInfo>
<X509Data>
    <X509Certificate></X509Certificate>
</X509Data>
</KeyInfo>
</Signature>
```

#### Description of mandatory elements of the signature

Element	Attributes	Description
CanonicalizationMethod	Algorithm="http://www.w	The following shall be indicated:
	3.org/TR/2001/REC-xml- c14n-20010315"	http://www.w3.org/TR/2001/REC-xml-c14n-20010315.
SignatureMethod	Algorithm="	Represents the signature algorithm. The
	http://www.w3.org/2001/0	following shall be indicated:
	4/xmldsig-more#ecdsa-	http://www.w3.org/2001/04/xmldsig-
	sha256 "	more#ecdsa-sha256.
Reference	URI="	Define reference to the message section to
		be signed. As the entire message will be
		signed and the signature will be added after
		signing, URI=" shall be indicated.

Transform	Algorithm="	The method used for adding the electronic
	http://www.w3.org/2000/0	signature has to be indicated:
	9/xmldsig#enveloped-	http://www.w3.org/2000/09/xmldsig#envelo
	signature "	ped-signature.
DigestMethod	Algorithm="	Represents the checksum calculation
	http://www.w3.org/2001/0	algorithm. The following shall be indicated:
	4/xmlenc#sha256"	http://www.w3.org/2001/04/xmlenc#sha256.
DigestValue		Indicates the message checksum. The value
		shall be indicated in base64 encoding.
SignatureValue		Indicates the electronic signature of the
		message. The value shall be indicated in
		base64 encoding.
X509Certificate		Indicates the certificate used for signing the
		message. The value shall be indicated in
		base64 encoding.

The procedure for signing an instant payment message and verification of the signature shall be as follows:

- 1. The debtor agent prepares, signs and sends the message to the instant payment service.
- 2. The instant payment service verifies the signature of the message and the validity of the signing certificate.
- 3. The instant payment service electronically signs the message using Latvijas Banka certificate and sends the message to the creditor agent.
- 4. The creditor agent verifies the signature of the message and whether the signing certificate matches that on the valid signing certificates list published by Latvijas Banka.